ANNUAL PROGRESS REPORT JULY 1973-JUNE 1974

USE OF REMOTE SENSING TECHNIQUES FOR INVENTORYING
AND PLANNING UTILIZATION OF LAND
RESOURCES IN SOUTH DAKOTA
NGL-42-003-007

ORIGINAL SOUTAINS

(NASA-CR-140574) USE OF REMOTE SENSING TECHNIQUES FOR INVENTORYING AND PLANNING UTILIZATION OF LAND RESOURCES IN SOUTH DAKOTA Annual Progress (South Dakota State Univ.) 96 p HC \$8.00 CSCL 08B

N74-34790

G3/13 51081



Remote Sensing Institute South Dakota State University Brookings, South Dakota 57006

ANNUAL PROGRESS REPORT JULY 1973-JUNE 1974

Use of Remote Sensing Techniques for Inventorying and Planning Utilization of Land Resources in South Dakota

NGL-42-003-007

Principal Investigator

V.I. Myers

Authors

C.J. Frazee

A.E. Rusche

D.G. Moore

G.D. Nelson

F.C. Westin

Remote Sensing Institute South Dakota State University Brookings, South Dakota 57006

ABSTRACT

General land use and soils data collected by remote sensing techniques are being used in South Dakota for land use planning and land evaluation. The basic procedures for interpreting remote sensing imagery to rapidly develop general soils and land use inventories were developed and utilized in Pennington County, South Dakota. These procedures and remote sensing data products have been illustrated and explained to many user groups, some of whom are interested in obtaining similar data.

The general soils data were integrated with land soils data supplied by the county director of equalization to prepare a land value map. A computer print-out of this map indicating a land value for each quarter section is being used in the tax reappraisal of Pennington County. The land use data have provided the land use planners with the present use of land in Pennington County.

Additional uses of remote sensing applications are also discussed including tornado damage assessment, hail damage evaluation, and presentation of soil and land value information on base maps assembled from ERTS-1 imagery.

TABLE OF CONTENTS

<u>P.</u>	age
ABSTRACT	i
TABLE OF CONTENTS	ii
LIST OF FIGURES	iv
LIST OF TABLES	V
ACKNOWLEDGEMENTS	٧i
INTRODUCTION	1
GENERAL SOILS INVENTORY	2
Procedures	3
Usefulness of ERTS-1 Imagery	4
Comparison with Existing Soil Association Map	11
Recommendations for Use of ERTS-1 Imagery to Interpret	
General Soil Map	13
Land Evaluation	14
Detailed Soils Inventory	18
USDA-SCS COOPERATION	19
Soil Mapping Unit Composition	19
Evaluation of ERTS-1 Imagery for Soil Survey	23
LAND USE	24
BIA COOPERATION	28
Resource Inventories	28
Conservation	32
Range Inventory	
Water Resources Planning	
nuce heading	

TABLE OF CONTENTS (cont.)

		Page
ADDITIONAL STUDIES	OF REMOTE SENSING APPLICATIONS	44
Tornado Damaç	ge Assessment	44
Hail Damage i	Evaluation	45
Data Analysi	5	48
A Map of Soi Imagery	Textures and Land Forms on ERTS-1	49
A Map of Soi	l Association Value Areas	52
LITERATURE CITED		53
PUBLICATIONS COMPI	ETED DURING GRANT PERIOD	54
APPENDICES		
Appendix A.	County land evaluation cost estimate correspondence	55
Appendix B.	Soil Scientists comments regarding evaluation of ERTS-1 imagery	56
Appendix C.	South Dakota Civil Defense Department comments regarding Disaster Coverage	57
Appendix D.	Brookings County Soil Information Map	58
Appendix E.	Congressional comments regarding Brookings County Map	59
Appendix F.	Land Value Map on ERTS Mosaic of South Dakota	60

LIST OF FIGURES

FIGURE		<u>P</u> /	AGE
1	Soilscape of eastern Pennington County		5
2	Usefulness of ERTS-1 imagery to delineate soilscape boundaries		9
3	Use of drainage pattern, color and land use pattern features of ERTS-1 imagery to delineate soilscapes of northern Pennington County	•	10
4	Current soil association map of eastern Pennington County		12
5	Land value map of eastern Pennington County	•	15
6	Computer print-out illustrating land value for each quarter in eastern Pennington County	•	17
7	Illustration showing (a) sample area with (b) density slicing compared with (c) detailed soil map	•	21
8	Land use map of Pennington County	•	25
9	Color display of land use map of Pennington County	•	26
10	Photo-interpreted units of Shannon County on ERTS-1 composite	•	29
11	Appearance of reservoirs, stockponds, rangeland boundaries and other features on four MSS bands of ERTS-1 imagery		
12	Signal Analysis and Dissemination Equipment	•	37
13	Classification of range site for pasture 1	•	40
14	Vegetation index with six classes derived from ratioed ERTS-1 data	•	41
15	Irrigation development on Rosebud Reservation area, South Dakota, interpreted from ERTS-1 imagery	•	43
16	Color infrared aerial photography illustrating ability for assessing tornado damage	•	44
17	Photograph of band 5 ERTS-1 mosaic with illustrated hail damaged area	•	47

LIST OF TABLES

TABLE		PAGE
1	ERTS-1 imagery of Pennington County, South Dakota used for interpretation of soil	. 3
2	Soilscapes of eastern Pennington County	6
3	Percent composition of Hand Bonilla soil mapping unit obtained with the density slicing lines transect, and detailed survey methods	. 22
4	Percentage of land capability classes and subclasses within photo mapped units	30
5	Percentage of range sites within photo mapped units	. 31
6	Ratings of ERTS-1 imagery for visual identification of selected ground features in Shannon County, South Dakota	. 34
7	Correlation Coefficients from analysis of field and film data for pasture 1	. 38

ACKNOWLEDGEMENTS

- 1. The NASA technical Officer for this grant is J.A. Vitale, NASA Headquarters, Office of University Affairs, Room 6125, 400 Maryland Avenue, S.W. Washington, D.C. 20546.
- 2. The photographic work was processed by Jack Smith, Head-Photo Lab, Remote Sensing Institute, South Dakota State University, Brookings, South Dakota.
- 3. The report was assembled by William J. Rippert, Instrumentation Specialist, and typed by Gerri Bushard, Secreta.y, Remote Sensing Institute, South Dakota State University, Brookings, South Dakota.

Use of Remote Sensing Techniques for Inventorying and Planning Utilization of Land Resources in South Dakota

ANNUAL PROGRESS REPORT JULY 1973-JUNE 1974

INTRODUCTION

Efficient management of the earth's resources is of paramount importance. The application of remote sensing techniques to many phases of natural resource management has been proven but the use of these data by action agencies is presently very limited. Therefore, the present activities of the Remote Sensing Institute NASA University Affairs Grant have been directed toward the utilization of remote sensing techniques by action groups.

The area selected for application of remote sensing techniques was Pennington County, South Dakota. This county was selected as the study area because the variety of soils and land uses are representative of Western South Dakota. The land area of the county is 711,500 hectares (1,778,700 acres) of which the Black Hills National Forest, Buffalo Gap National Grassland, and Badlands National Monument comprise most of the 280,100 hectares (700,300 acres) of public land. In addition, the second largest city in South Dakota, Rapid City (population 55,000), is located in the county.

Once the study area was selected, a meeting with the county resource planners and managers was held to accomplish the following objectives:

- 1. Explain remote sensing technology
- 2. Describe proposed remote sensing activities in Pennington County
- 3. Obtain a response from meeting participants as to the desirability of conducting the study in Pennington County
- 4. Determine specific action agencies that could use remote sensing data for their decision making processes.

As a result of this meeting the following agencies were deemed most likely to provide input and to use the output of the remote sensing applications:

- South Dakota Sixth Model Rural Development and Planning District (Sixth District Council of Government)
- 2. Black Hills Conservancy Sub-District
- 3. Pennington County Planning and Zoning Commission
- 4. USDA Soil Conservation Service
- 5. Pennington County Director of Equalization
- 6. USDA Forest Service
- 7. USDA Agricultural Stabilization and Conservation Service
 These agencies were contacted individually and possible applications of remote sensing technology to their problems were discussed in detail.

This report contains the progress to date in the various application areas which are being pursued. The major effort in Pennington County, South Dakota, involving soils inventory and land evaluation will be discussed first. Then, additional studies of remote sensing applications will be discussed. These efforts are being funded in part by the State of South Dakota, the specific action agency, and the NASA University Affairs Grant. It is estimated that a minimum of 40 percent of the total support required for the efforts described herein are coming from the involved action agencies.

General Soils Inventory

The 1970 South Dakota legislature enacted a law which required that agricultural land be assessed for taxation purposes according to the potential of the land to produce agricultural crops or native grasses. Subsequent to the 1970 legislative directive, guides for land evaluation were developed for each county in South Dakota (Westin et al., 1974). These guides utilize yield estimates, soil inventory information, and sales data to develop a dollar value for each kind of soil limitation for the county directors of equalization.

Adequate soil surveys necessary to use the county land evaluation guides are not available for 41 of the 67 counties in South Dakota. Pennington County is one of the counties which does not have adequate soils information to comply with the directives of the 1970 legislature.

The present methods of surveying soils are too time command and expensive to fulfill the need in the required time perio. The come required to collect soils data by remote sensing techniques becomes greater as the soils information becomes more detailed. For general soils data, ERTS-1 imagery was interpreted since it was available and could be provided quickly for almost immediate use.

Procedures

The ERTS-1 imagery available for Pennington County was evaluated and transparencies from three dates were selected for further analysis (Table 1). Color transparency composites at 1:1,000,000 scale were made from bands 4, 5, and 7, and enlargement negative prints at scales of 1:500,000 and 1:250,000 were made from bands 5 and 7 from the September 6 and October 12 imagery. A band-7 transparency for December 5, 1973, was enlarged to 1:250,000. The area was snow covered at this time.

Table 1. ERTS-1 imagery of Pennington County, South Dakota used for interpretation of soils.

Date	Frame Identifi- cation	Color Compo- site	Positive Transpar- encies, Bands 4,5,6 & 7	Enlargeme Prints of 1 500,000	nt Bands 5 & 7 1 250,000
October 12, 1972	1045-17063 1081-17064 1135-17078 1135-17074	X	X X X	X X	X X X

The ERTS-1 imagery was interpreted using a light table and a three power magnifying glass. Areas with similar image characteristics were delineated on mylar on imagery from September 6, 1972. This overlay was then placed over the other color composite and positive black and white transparencies for additional interpretation using the data from the other dates.

For field checking, the ERTS-1 interpretation was transferred to a 1:250,000 USGS topographic map and a 1:60,000 ASCS photo index map of

Pennington County. The field checking consisted of a reconnaissance survey by a resource team consisting of a geologist, range scientist, and soil scientist, which described the soils, vegetation, and geology for each mapping unit. The general soils map interpreted from ERTS-1 imagery is shown in Figure 1. Table 2 provides the map legend which includes a description of soils, geology, and land use along with suitability ratings for rangeland, cropland, and groundwater development.

Usefulness of ERTS-1 Imagery

The color composite transparencies of the ERTS-1 imagery were most useful for interpretation of boundaries among the soilscape areas. The interactions among the individual bands provided an additional characteristic for interpretation (Figure 1). Most of the boundaries of the soilscape areas were delineated very well on the ERTS-1 imagery (Figure 2). The thick lines in Figure 2 mark those boundaries located on ground which were not detected from the ERTS-1 imagery. The delans were either too small or too similar to adjoining areas. The concarries between the soilscape areas were as easily interpreted from transparencies at a scale of 1:1,000,000 as from enlargement prints at a scale of 1:250,000. Areas such as flood plains however, which were too small to delineate using the color composite transparency at a scale of 1:1,000,000, could be mapped using the 1:250,000 enlargement prints.

The image features or characteristics of the E.TS-1 color composite transparency used for interpreting the soilscape boundaries were tone, color, land use patterns, and drainage patterns. Figure 3 provides an illustration of the use of drainage pattern, color, and land use patterns to delineate soilscapes in northern Pennington County. Drainage pattern was used in conjunction with color patterns to interpret the boundary between the steep shale breaks (B1) and hilly to steep sandstone breaks (C1). The steep shale breaks have yellowish-red hues and a dendritic drainage pattern (Figure 3). Difference_ in color were utilized to draw the boundary between the undulating shale plains (B4) and the undulating to gently rolling sandstone uplands (C3).



Figure 1. Soilscapes of eastern Pennington County. Scale = 1:1,000,000

REFIGURE CHARTY OF THE ORIGINAL PAGE IS TOOK

Unit	Land Form	Geologic Material	Soil	Range Site	Land Use	*507	Ground Water**
¥	Soilscapes from White	River Sediments					
A1	Hilly to very steep barren badlands	Siltstone and shale	None	None	Non- Agricultural	8 s	None to Poor
A2	Undulating to gently rolling uplands	0-5' of terrace alluvium over White River Sediments	Shallow to Moderately Deep Claycy Soils	Clayey- Shallow	Rangeland	4e-6s	Poor
А 3	Nearly level to undulating badland basins	Clayey alluvial sediments	Shallow to Mod- erately Deep Clayey Soils	Clayey- Shallow	Rangeland	4e-6s	Poor
A4	Nearly ievel to undulating	5-20' of terrace alluvium and aeolian deposits over White River Sediments	Deep Silty and Loamy	Silty- Sandy	Cropland- Rangeland	3c-3e- 4e	المالية المالية
89	Soilscapes from Pierre	Shale		•			•••
. 18	Steep shale breaks	Pierre Shale	Shallow to Moderately Deep Clayey Soils and Shaleland	Shallow	Rangeland	7s-7e- 8s	None to
85	Undulating to rolling sideslopes	Colluvium from Pierre Shale	Shallow, Mod- erately Deep to Deep Clayey Soils	Clayey	Rangeland	6e-4e- 6s	Poor
83	Undulating to gently rolling plains	Colluvium from Fox Hills Sandstone and Pierre Shale	Deep Clayey and Thin Claypan Soils	Clayey- Claypan	Rangeland	4e-6s	Fair to Good

Table 2. Soilscapes of Eastern Pennington County


REFRONCE MADE TO THE ORIGINAL PAGE IS FOUR

		Table 2.	Continued				
Unit	Land Form	Geologic Material	Soil	Range Site	Land Use	rcs*	Ground Water**
22	Undulating plains	Thick colluvium from Moderately Deep Pierre Shale to Deep Clayey Soils	1	Clayey	Cropland	4e	Fair
82	Undulating to rolling dissected terraces	5-10' of terrace Moderately Desalluvium over Pierre to Deep Loamy Shale	Ω.	Clayey- Thin Upland	Rangeland	4e-6e	Fair
98	Undulating to gently rolling terrace remnants	5-10' of terrace alluvium over Pierre Shale or White River Sediments	Deep Loamy Soils	Clayey	Rangeland- Cropland	3e-4e	Fair
87	Nearly level to undulating terrace remnants	5-50' of terrace alluvium over Pierre Shale	Deep Loamy Soils Clayey	Clayey	Cropland	36-36	Fair
82	Nearly level terraces	5-20' of terrace Deep Silty and alluvium over Pierre Loamy Soils Shale	Deep Silty and Loamy Soils	Silty- Clayey	Cropland	36	Fair to Good
83	Hearly level terraces	0-5' of terrace Moderately [alluvium over Pierre Loamy Soils Shale	Moderately Deep Loamy Soils	Silty	Rangeland	45	Fair to Good
اد	Soilscapes from Fox H	Hills Formation					
3	Hilly to steep breaks	Fox Hills Sandstone and Shale	Shallow to Mod- erately Deep Loamy Soils	Shallow	Rangeland	78	Fair
2	Rolling uplands	Colluvium from Fox Hills Sandstone and Shale	Shallow, Moderately Deep to Deep Silty Soils	Silty- Shallow	Rangeland	sge9	Fair to Good
		•					


Table 2. Continued

Unit	Land Form	Geologic Material	Sofl	Range Site	Land Use	+SJ7	Ground Water**
ន	Undulating to gently rolling uplands	Colluvium from Fox Hills Sandstone and Shale	Deep Silty Soils	Silty	Cropland	3e-4e	Fair to Good
2	Nearly level to undulating uplands	Colluvium from Fox Hills Sandstone and Shale	Deep Silty Soils Silty	Silty	Cropland	3e-3c	. Fair to Good
۵	Flood Plains						
10	Flood plains of Cheyenne and White Rivers	Sands and fine textured alluvium	Deep Clayey and Thin Sandy Soils	Clayey Overflow	Rangeland Hayland	4s-4e 6w	Excellent
05	Flood plains of Rapid, Box Elder, and Spring Creeks	Medium textured alluvium	Deep Silty Clay Loam Soils	Overflow	Hayland	3с-5м	Excellent
u	Soilscapes from Black	Hills Footslopes	•				
ដ	Rolling uplands	Colluvium from Carlisle, Greenhorn and Niobrara Formations	Moderately Deep Clayey and Loamy Soils	Thin Upland- Rangeland Clayey	Rangeland	6e-4e	Fair to Poor
. 23	Rolling uplands	Clayey colluvium and Shallow to Hod- bedrock from Gran- erately Deep eros Group Clayey Soils	Shallow to Mod- erately Deep Clayey Soils	Shallow- Clayey	Rangeland	6s-6e	Fair to Poor

* LCS Land Capability Subclass ** Potential for development of household wells

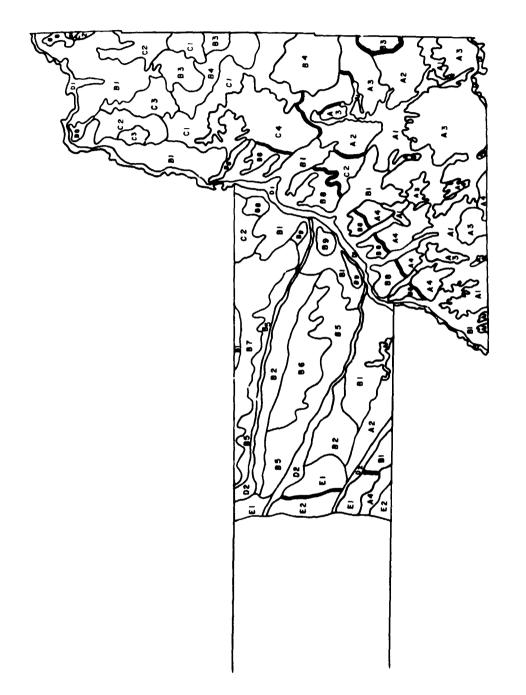

Usefulness of ERTS-1 imagery to delineate soilscape boundaries. Thick lines indicate boundaries not detected on ERTS-1 imagery. See Table 2 for legend. Figure 2.

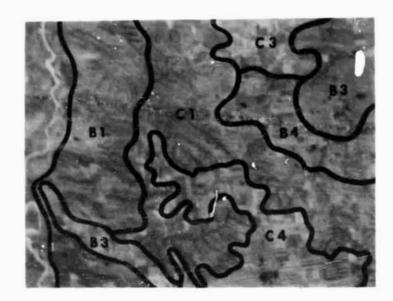

Drainage Pattern--C1 was separated from B1 by change in drainage pattern and color. C1 has reddish colors and a dendritic drainage pattern. B1 has yellowish-green colors and a pinnate drainage pattern.

Colo: - The boundary between B4 and C3 was delineated by a color change. The fields in the B4 have lower reflectance.

Land Use--The B3 areas have a rangeland land use pattern. The B4 areas have a cropland pattern.

Figure 3. Use of drainage pattern, color and land use pattern features of ERTS-1 imagery to delineate soilscapes of northern Pennington County. Enlargement print of color composite. July 9, 1973. 1351-17064. Scale = 1:250,000.


These two areas have similar land use patterns, but the reflectance from the soils developed from the olive-gray Pierre Shale is less than that from the soils developed from the grayish-brown Fox Hills Formation (Figure 3).

In summary, the advantages of ERTS-1 imagery most useful to this study were the synoptic view and multispectral imagery. The synoptic view provided by ERTS-1 imagery allowed large areas to be viewed and studied from the same perspective. Therefore, differences in reflectance patterns of noncontiguous areas are meaningful and can be used to delineate general soil areas (soilscapes). The multispectral feature of ERTS-1 imagery provides a new tool for studying soil differences.

Comparison With Existing Soil Association Map

More areas were delineated on the soilscape map using ERTS-1 imagery as described above than on the existing soil association map (Figures 1 and 4). Three reasons may be cited to explain this. The soilscape map is at a scale of 1:250,000 whereas the existing soil association map is at a scale of 1:500,000. More and smaller areas may be delineated on the larger scale map. Secondly, the field work provided additional information which was used to distinguish more areas. The existing soil association map was based upon previous field information, and no field checking was performed in its preparation. Thirdly, the use of the ERTS-1 imagery allows further delineations within some of the large soil associations on the existing map. These separations are obvious when the existing map is plotted on the photographic-like background of the ERTS-1 imagery rather than a line map.

The major differences between the two maps are in the areas with soils formed on the Fox Hills Formation, White River Sediments, and terraces overlying the Pierre Shale. The Badlands association (69) of the ex sting map was split into two soilscapes (A1, barren badlands and A3, badland basins). This separation was made possible by the use of a photographic image background. The barren badlands have a very high reflectance (light

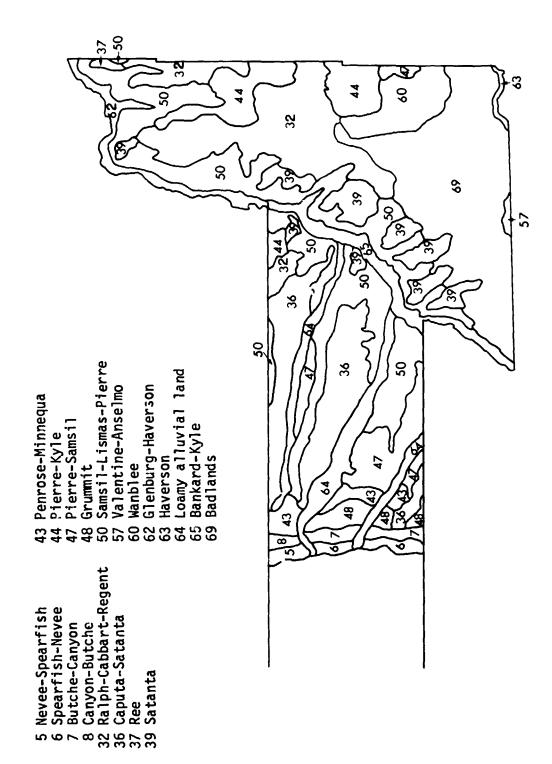

Current soil association map of eastern Pennington County (Westin and Bannister, 1971). Original scale = 1:500,000. Figure 4.

photographic tone) which can be used to distinguish the areas from other soilscapes (Figures 1 and 4). The Ralph-Cabbart-Regent area (32) on the existing map was divided into four parts using color and color pattern interpretations (Figures 1, 3, and 4). The rangeland soilscapes C1 and C2 were separated from the cropland soilscapes C3 and C4 by the difference in the color pattern of the ERTS-1 image which is due to the difference in land use (Figure 1 and Table 2). The area denoted by C1 is distinguished from C2 by a more distinct drainage pattern (Figure 1). C3 is located physically separate from C4. The Caputa soil association (36) was separated into three parts utilizing differences in color patterns related to land use (Figure 1). The B5 soilscape is dominantly rangeland; whereas, the B7 soilscape is mostly cropland.

Recommendations for Use of ERIS-1 Imagery to Interpret General Soil Maps

The ERTS-1 imagery gives soil scientists a new tool for interpreting general soil areas. The use of ERTS-1 imagery for preparing a general soils map has been discussed in this paper. Based upon this work, the following recommendations are intended to provide guidelines for use of ERTS-1 imagery to obtain soil information for areas where soils data are lacking.

The following materials are needed:

- 1. ERTS-1 imagery -- single band transparencies, color composite transparencies, preferably for more than one season
- 2. Enlargement prints of ERTS-1 imagery -- scale to base maps, the 1:250,000 USGS topographic map series covers the entire U.S.
- 3. Existing soil and geologic information
- 4. Topographic or other existing base maps
- Photo index maps for existing aircraft coverage -useful for plotting boundaries interpreted on ERTS-1
 imagery.

ERTS-1 imagery can be enlarged to 1:125,000 without a serious loss of detail.

The production of a general soils map using ERTS-1 imagery can be separated into three major parts. The first part involves the following items:

- 1. Locating and evaluating existing ERTS-1 imagery
- 2. Summarizing existing soils information
- 3. Interpreting ERTS-1 imagery
- 4. Drafting initial legend and map
- 5. Transferring map to 1:250,000 topographic map for field checking.

This part involves from 1 to $1\frac{1}{2}$ weeks time.

The second part is the field checking of the interpreted map. Boundaries interpreted in the office are verified. The soils, geologic material, and vegetation are described for each mapping unit. The time needed to complete this part is dependent upon the size of the area. For an area similar in size to eastern Pennington County (400,000 hectares or 1,000,000 acres) which had some soils information available, 2 to 3 weeks time was necessary for the field work.

The final part includes draiting the final map and legend and writing the report. One to two weeks are required for this work.

Land Evaluation

The soilscape map was used along with dollar values from land sales supplied by the director of equalization to prepare a land value map (Figure 5). This map has been provided to the Pennington County Director of Equalization for evaluation and use.

The general soils data are being used by the Director of Equalization in comparing the average value of general soil areas in the county for equalization among areas.

- I. This map was prepared by:
 - 1. Calculating a productivity index for each soilscape area. The yields for both agricultural crops and native grass were used. The yields are summarized by land capability subclass and range site (Westin et al., 1974).
 - 2. Relating the land sales in the county to the soil areas. A value is determined for each kind of soil in the county based upon the productivity index.

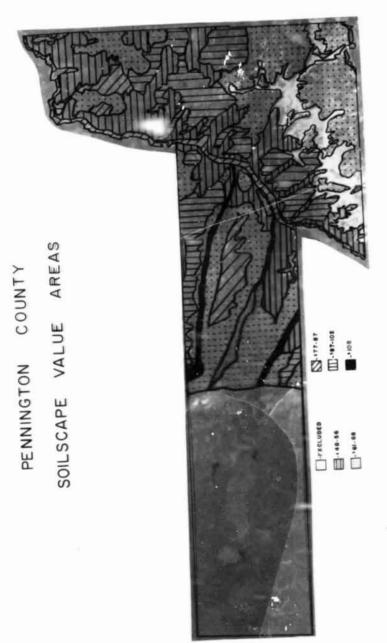


Figure 5. Land value map of eastern Pennington County.


 Utilizing this relationship along with the soil data, the land value for each soilscape area is computed.

After several meetings with the State Department of Revenue, it was decided that a computer print out indicating a land value for each quarter section (160 acres) would be useful for appraising land value for taxation. The general soils map of Pennington County, was coded into the computer on a quarter section basis. A computer program was written to relate the procedures for Jetermining land value to the soils data. The resulting computer print-out is shown in Figure 6. This information is being used by the appraisers of the consulting firm which is reappraising Pennington County. If this approach proves useful, the other counties in western South Dakota which need soils data for land evaluation will be interested in securing similar data. It should be noted that this level of information is not cuitable for evaluating individual parcels of land but it can be used as an equalization guide among various soil units.

This work was reported at the Ninth International Symposium on Remote Censing of the Environment held April 15-19, 1974, at Ann Arbor, Michigan (Frazee et al., 1974). In addition, a newspaper release on the work has been sent to the major newspapers in South Dakota and a half-hour television program on the South Dakota Educational Network was presented.

This work has been reviewed by the Bureau of Indian Affairs for use in providing soils data for water rights determination on the Rosebud Reservation. Based upon this review, they have funded a contract to provide general soils data for the Rosebud Reservation and surrounding areas utilizing the remote sensing methods and techniques developed in the Pennington County study. The soils data will provide basic information for a reservation-vide hydrologic study. The area being studied under this contract is over 5,000,000 acres (2,000,000 hectares).

The soil map and land evaluation map of Pennington County have generated considerable interest in other counties. To date, cos* estimates for three other counties have been prepared and sent to the local county directors of equalization (see Appendix A). Other agencies which have been contacted and which have shown interest are the U.S. Forest Service, Planning Bureau, and the United Sioux Tribes.

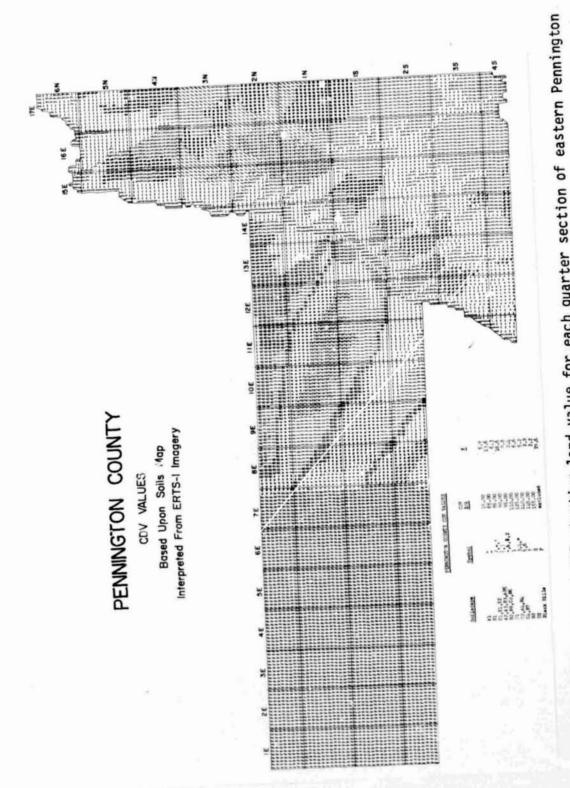

Computer print-out illustrating land value for each quarter section of eastern Pennington County. Figure 6.

Detailed Soils Inventory

Aircraft imagery is being used to extract detailed soils information. Because of the time required, interpretation is being limited to a seven township area using the aircraft data. Black and white Agricultural Stabilization and Conservation Service (ASCS sotographs of the area have been procured at a scale of 1:20,000. High tude NASA 80-57 imagery at a scale of 1:125,000 is also available for accerpretation. Preliminary interpretation of the area is almost complete. Field checking and evaluation in cooperation with the USDA Soil Conservation Service will be scheduled.

The detailed soils data will be used by the County Director of Equalization in the following manner:

- 1. For each tract of agricultural land, the acres of each soil mapping unit are measured
- The value of each land tract is determined by the dollar value for each soil type multiplied by the acreage of that soil
- 3. The summation of the values of each soil area within the parcel is the total value of bare agricultural land.

The USDA Soil Conservation Service (SCS) will assist in the evaluation of the detailed soils data obtained by utilizing remote sensing methods and in the determination of whether or not present methods of surveying soils can be improved with remote sensing data. Once the detailed soil survey has been evaluated and studied for usefulness, the county commissioners will be asked to provide money support for surveying the soils of the remainder of Pennington County.

USDA-SCS COOPERATION

Soil Mapping Unit Composition

A soil survey report includes the description of soil composition (kind and amount of each soil) for each soil mapping unit (area). The development of this information requires an experienced soil surveyor and is very time consuming. Previous work has suggested that density slicing techniques may be useful to the soil surveyor for determining the composition of soil mapping units (razee, Myers, and Westin, 1972). This study consisted of comparing a remote sessing technique (density slicing) with the standard methods of determining soil composition (transect method) using a detailed map for control. This work is being accomplished cooperatively with the soil surveyors who are in the process of preparing a detailed soil survey for Beadle County, South Dakota.

Four different areas of the same soil mapping unit in Beadle County were selected for study. These fields were selected randomly from the Agricultural Stabilization and Conservation Service (ASCS) photographs which were used in the mapping of Beadle County. These black and white ASCS field sheets (photographs) were used due to their availability and scale (1:15,840). They were taken in July 1957. The contrast or the photographs was poor in comparison to more recent remote sensing images.

The density slicing was accomplished by placing the black and white photographs over the light source on the density slicing device. The tone censity was divided into eight levels. The eight density levels were interpreted by the soil surveyors as to the soils they represented. Three major categories of soils were assumed: Hand soil, Bonilla soils, and other soils. The percent composition of these categories as determined using the automatic planimeter associated with the densing slicing machine.

Line transects were conducted in all four fields by transecting the field twice diagonally. The line transect method is routinely used by soil surveyors and assumes the soil mapper can recognize the soil without boring

¹ (D. Heil, USDA-SCS, Beadle County Survey Party Chief and D. Bannister, USDA-SCS, State Soil Scientist.


The pacer recorded the number of paces between soil breaks while the other two members of the party observed the soil. The paces for each soil series were subsequently summed for the whole field and converted to percentages. Percent composition was determined for three groupings of the soils: Hand, Bonilla, and Others (included soils).


The detailed mapping was considered the control and was conducted after the transects were completed. Individual phases of soil series large enough to delineate at the scale of the field sheet (1:15,840) were separated. The fields were broken down into the same soil categories as the transect data: Hand, Bonilla, and Others. Overlays were constructed for each soil category and measured with the automatic planimeter of the density slicing machine to determine the percent of each. The percent of each category was determined, and the display was photographed for comparison with the density sliced output. Figure 7 illustrates the comparison of the results for each method.

Upon comparison with the detailed map, the light tones or lighter colors frequently corresponded to Ethan, Davison, Tetonka, and Dudley soils (Others). The dark tones or darker colors generally corresponded to the Bonilla soils and the medium tones to the Hand soils (Figure 7). However, composition was difficult to determine as the same tones did not always correspond to any one soil. For example, some Hand soils occurred within both the encoded dark tones and also within the encoded light tones. When the percentages of the encoded composites from the density slicing analysis were averaged, the average composition of the four fields was 39% Hand, 44% Bonilla, and 17% other soils (Table 3).

The line transect method required approximately 1.5 hours for an (80 acre) field whereas the density slicing method required 30 to 40 minutes. An average composition of 42.5% Hand, 37% Bonilla, and 20.5% other soils was determined for the four fields by the line transect method (Table 3).

The detailed mapping of the four fields provided a check and was used as a basis for comparing the results of the transect method and the density slicing. Average composition of the four fields was 36.5% Hand, 35% Bonilla, and 28.5% other soils (Table 3).

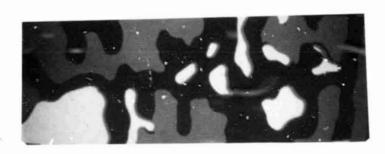

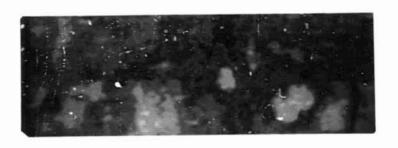

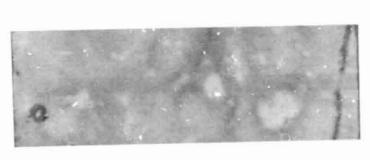


Illustration showing (a) sample area with (b) density slicing compared with (c) detailed soil map. Figure 7.

Table 3. Percent composition of the Hand-Bonilla soil mapping unit obtained with the density slicing lines transect, and detailed survey methods.

Field	 								
No.	<u>De</u>	nsity sli	cing	Li	ne transe	ct	Det	ailed sur	vey
	Hand	Bonilla	<u>Others</u>	Hand	Bonilla	<u>Others</u>	Hand	Bonilla	<u>Others</u>
1	48	23	29	37	38	25	48	28	24
2	36	46	18	52	36	12	39	30	31
3	39	50	11	36	41	23	35	42	23
4	33	57	10	45	34	21	24	48	18
Ave.	39	44	17	42.5	37	20.5	36.5	35	28.5

The soils composition of the soil mapping unit as estimated by both the density slicing analyses and transect methods was similar (Table 3). The density slicing method was not successful in mapping the individual soils which comprise the mapping unit because the density contrasts, timing, and film-filter combinations of the photography were far from ideal. If more contrasting photography had been available, better results may have been achieved. A report entitled "Density Slicing for Determining the Composition of a Soil Mapping Unit" has been written and is in the final stages of review.

The density slicing techniques employed in this work will be evaluated in other situations. A proposal entitled "Use of Remote Sensing Data to Delineate Claypan Soils Requiring Deep Plowing in the Oahe Project" has been submitted to the U.S. Bureau of Reclamation. This proposal suggests studying density slicing analyses as a tool for better delineation or mapping of claypan soils requiring deep plowing for reclamation before irrigation in the Oahe project area.

Evaluation of ERTS-1 Imagery for Soil Survey

ERTS-1 interpretation techniques to permit delineation of general soil areas is a fairly recent development. Most soil scientists have not even seen ERTS-1 imagery and consequently are not familiar with italiance bilities or the required interpretation.

Ten South Dakota USDA-SCS soil scientists who are soil survey party chiefs have been provided with ERTS-1 contact prints and prints at a scale of 1:250,000 from 2 seasons of the year. In addition, color composite transparencies were sent to three county soil surveyors. Remote Sensing Institute soil scientists are working with the agency personnel providing training and assistance in interpreting the imagery. Additional ERTS-1 imagery will be provided to the soil scientists as it becomes available. The soil scientists comments evaluating the ERTS-1 imagery for their use are included in Appendix B.

This effort is providing the opportunity for soil scientists to become knowledgeable about ERTS-1 imagery and to actually evaluate how useful the imagery is for purposes of soil surveying. It is hoped that the use of imagery in the soil survey program will be established through this program. The USDA-SCS is providing all the support for the USDA-SCS soil scientists cooperating on this effort.

LAND USE

Current land use information is practically non-existent in South Dakota. The data that are available are commonly in tabular ion, and not presented in a form suitable for evaluation in terms of geographic distribution. South Dakota is being encouraged, both by pressure within the state and by pending federal legislation, to develop land use plans at various levels. Although the utility of remote sensing techniques for certain aspects of land use planning has been established, its use by local, county, and state land use planning groups in South Dakota is very limited.


Pennington County, South Dakota, was selected as a test site to illustrate the use of ERTS-1 data for level I land use inventorying (Anderson et al., 1972) in Western South Dakota. The level I land use categories were interpreted from ERTS-1 color composite prints at a scale of 1:250,000. An overlay map showing the location and amount of each land use category of level I has been prepared (Figure 8). The inventory has been computer encoded using a 64 hectares (160 acre) cell size. The data may be either printed out or displayed on a color television monitor (Figure 9). A township boundary overlay has been prepared for use in locating the areas in the county. The South Dakota Sixth Model Rural Development and Planning District has the preliminary land use data and is utilizing it for their planning purposes. The primary use of the level I land use data is to establish current land use and to indicate areas needing more detailed data.

This land use inventory was reviewed by the Bureau of Indian Affairs soil and range scientists, and a subsequent contract was entered into to obtain similar level I land use data for the Rosebud Reservation and surrounding areas. This inventory, plus an inventory delineating irrigated land, was provided for an area of over 2,000,000 hectares (5-million acres) on May 15, 1974.

The level I land use data have been described and discussed with many agencies and groups in South Dakota. Cost estimates have been submitted to the State Planning Bureau of inventorying level I land use for the entire state of South Dakota plus computer encoding of the data. Other agencies which have shown considerable interest in obtaining land use data for selected



Figure 8. Land use map of Pennington County.

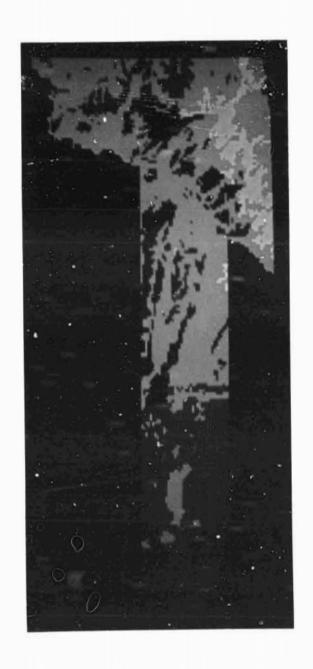

Black - Urban and Built Up Land Dark Green - Agricultural Land Tan - Range Land

Reddish Brown - Forest Land Blue - Water Light Grey - Barren Land

Figure 9. Color display of land use map of Pennington County.

portions of the state are the USDA Forest Service for the Black Hills, USDA Soil Conservation Service for western South Dakota, and United Sioux Tribes for the Lower Brule Reservation. A popular type publication, which will explain level I land use data and how to use these data, is in preparation.

BIA COOPERATION

Resource Inventories

The Bureau of Indian Affairs has the responsibility for the resource management of vast acreages. In South Dakota alone, Indian lands comprise approximately 2,000,000 hectares (5-million acres). Some reservations have detailed soil data while others have very limited soils information. In all cases, general resource maps required for broad reservation-based planning are not available. Interpreted ERTS-1 imagery can provide much of the broad based information required by BIA resource managers. This effort, funded primarily by BIA but utilizing NASA acquired imagery, was designed to illustrate the utility of ERTS-1 data for resource management of Indian lands in South Dakota.

A general soil map of Indian lands in Shannon County, South Dakota, has been prepared by interpretation of an ERTS-1 color transparency (Figure 10). This map was prepared in cooperation with BIA personnel². The Pine Ridge Indian Reservation had completed a standard soil survey and this information is being used to evaluate the usefulness and accuracy of the ERTS-1 interpretation. The soil units mapped from the ERTS-1 image (Figure 10) were characterized according to land capability subclass and range site, using the standard soil survey maps published in the Soil Survey of Shannon County (Radeke, 1971). The photo map units interpreted from the ERTS-1 imagery had different compositions of range sites and soil capability classes and subclasses (Tables 4 and 5). The data contained in Tables 4 and 5 indicate that areas related to soils can be interpreted from ERTS-1 imagery. Each of the photo-mapped units interpreted from ERTS-1 imagery had an unique range site and land capability subclass composition. Therefore, the photo interpreted units were general soil resource areas. The preliminary indications are that the information provided by ERTS-1 interpretations are superior to other available information for reservation wide planning.

² R. Carey, Area Soil Scientist

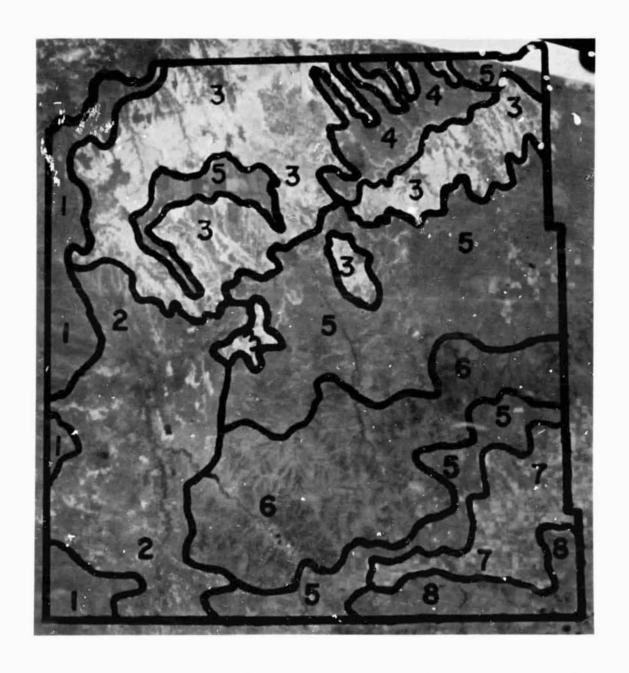


Figure 10. Photo-interpreted units of Shannon County on ERTS-1 composite. Scale = 1:500,000. August 19, 1972. 1027-17065.

Table 4. Percentage of Land Capability Classes and Subclasses within Photo Mapped Units

174252	*** *******	.2.2.1		Pho	to Map	ped Un	it	T. TTAN 22 E		
		•	1	2	3	4	5	6	7	3
·	VIII	s	3	5	48	8	1			
Shannon Courty ty Classes and Subclasses	VII	s	8	2	3		27	53		
	IV	е	61	25	23	80	26	37	23	67
	VI	S	8	20	10		14		6	
	VI	W		4	2					
	٧	W								9
	IV	e	11	20	5	1	12	3		19
	IV	s		13	3	8	5		5	
	III	С		1	2		1			
	III	е	9	5	1		6	1	14	5
	III	W		3	1			2		
. T.	II	С		2	1		5	4	22	
Capability	II	e			1		3	FX	30	

Table 5. Percentage of Range Sites Within Photo Mapped Units

			Ph	oto Map	ped Uni	t			
		1	2	3	4	5	6	7	{
	Sb								9
Range Sites in Shannon County	0 v		7	3		1	2		
	CD	ي							
	SL		3					3	
	Sa	3		2	38				67
	Sy	17		5	21	3		3	24
	Si	3	26	19	25	52	45	86	
	CS								
	Су	55	37	13		3			
	Ср		2	3	8	3		5	
	Sw	6	16	3		37	5 3	3	
	าบ	3							
Ba	DC	5	1	2					
Ì	ТСр	5	3	2					
	NONE	3	5	48	8	1			

Conservation


On all Indian lands, certain conservation practices such as strip-cropping, contour farming, and terracing are required of farmers and ranchers leasing Indian lands. The certification and monitoring of Indian lands to assure that adequate conservation practices are being adhered to is a sizable task. In fact, present techniques, coupled with limited personnel, are not effectively monitoring the Indian lands.

Contact prints of single band transparencies, color composites, and prints of ERTS-1 imagery at scales of 1:500,000, 1:250,000, 1:125,000 and 1:60,000 for two different overpasses were evaluated for identifying fields which were wind stripcropped, contour stripcropped, or gully eroded. Features such as reservoirs, stockponds, wells, land use boundaries, and blow-outs, were also studied for ease of identification from ERTS-1 imagery. Certain agricultural conservation features such as wind stripcropping, contour stripcropping, reservoirs, and stockponds can be visually identified on ERTS-1 imagery (Figure 11, Table 6). Other features like wells, blow outs, areas burned by fire, prairie dog towns, and hay cutting areas can only be identified with ground control (Table 6).


There is considerable potential for using ERTS-1 imagery for making general soil maps and for monitoring certain conservation farming practices and related agricultural features. This type of information is useful to agencies, such as the Bureau of Indian Affairs, in areas where detailed soils information is not available.

Range Inventory

Range inventories of most of the Indian lands in South Dakota are completed. These inventories provide basic resource data for land use and management decisions on Indian lands. These inventories provide detailed information on range site, range condition, watering points, and several other categories of information obtained during a field survey. Coupled with information on climate, the data in these surveys permit estimates of

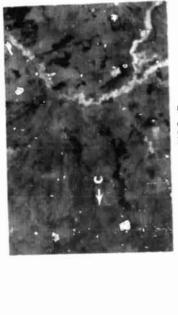

MSS-5

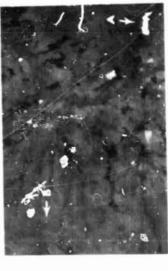

MSS-7

Appearance of reservoirs, stockponds, rangeland boundaries, and other features on four MSS bands of ERTS-1 imagery. August 19, 1972. 1027-17065. Figure 11.

MSS-4

lable o. R	atings of this	.ı ımayery	101 418	מפון ומפוונות	וכמנוסוו סו	פובכובם פנ	ound reatur	es in s	nannch cou	lable o. Ratings of Eris-1 imagery for fisual identification of selected Ground Features in Snannon County, South Dakota	
		Augi	August 1972					Σ	May 1973		
Feature	Scale	Band 4 (Green)	Band 5 (Red)	Band 6 (Infrared)	Bano 7 (Infrared)	Color Composite	Scale	Band 5 (Red)	Band 7 (Infrared)	Color Composite Enlargements	:
Wind Strip- 1 cropping 1	1:1,000,000 1:500,000 1:250,000	044	325	m m	H 10 4		1:500,000 1:250,000 1:125,000 1:60,000	PPPP	7 m m m	1884	
Contour Strip- cropping	1:1,000,000 1:500,000 1:250,000	000	004	044	9110	011	1:500,000 1:250,000 1:125,000 1:60,000	пппп	0000	H88H	
Reservoirs	1:1,000,000 1:500,000 1:125,000	 0.0	100	444	444	міі	1:500,000 1:250,000 1:125,000 1:60,000	7227	यस्य	ოოოო	
Stock Ponds	Stock Ponds 1:1,000,000 1:500,000 1:250,000	О НН	001	~ m m	w 4 4	811	1:500,000 1:250,000 1:125,000 1:60,000	нен	4446	~~~	
Wells	1:1,000,000 1.500,000 1:250,000	000	000	000	0 00	011	1:500,000 1:250,000 1:125,000 1:60,000	0000	0000	0001	

Table 6. Continued

	Band 7 Color Composite (Infrared) Enlargements	1 2 3 3 3	0000		നനന :
May 1973	Band 7 (Infrared)	444%	0000	0000	ოო ოო
	Band 5 (Red)	ийнн	0000	HHHO	ოოოო
	Scale	1:500,000 1:250,000 1:125,000 1:60,000	1:500,000 1:250,000 1:125,000 1:60,000	1:500,000 1:250,000 1:125,000 1:60,000	1:500,000 1:250,000 1:125,000 1:60,000
	Color Composite		-11	011	H00
	Band 7 Color (Infrared) Composite	400	121	0 m m	~ က လ
97.2	Band 6 (Infrared)	พ๓๓	000	Опн	OI OI
August 1972	Band 5 (Red)	w44	ოოი	044	⊣ m m
Æ	Band 4 B (Green)	Nmm	0 m 01	0 H H	H 01 01
	Scale	1:1,000,000 1:500,000 1:250,000	1:1,000,000 1:500,000 1:250,000	1:1,000,000 1:500,000 1:250,000	1:1,000,000 1:500,000 1:250,000
	Feature	Cropland Boundary	Range land Boundary	Gully 1:1 Erosion 1:5 (Cultivated 1:2 fields)	Blow-outs (Wind) erosion

35

stocking rates, crop yields, and suitability for a variety of land use alternatives. Because of use changes, a need exists for techniques to periodically update and improve existing inventories. At present, the Bureau of Indian Affairs does not have sufficient personnel to accomplish the updating work by conventional techniques.

Previous work at the Remote Sensing Institute in cooperation with the Bureau of Indian Affairs has demonstrated that much of the soil and range information obtained by field surveys can be interpreted from photographs (Frazee and Carey, 1972). Techniques to extrapolate remote sensing range and soil information from detailed test sites to other similar areas have not been developed. The problem studied was that of predicting or estimating range production (herbage yield) using remote sensing technology. Vegetative and soil data were collected for rangeland test sites utilizing a 100 meter grid sampling pattern. The following 70-mm aircraft imagery was collected at the time of the ground sampling:

Camera #	<u>Film</u>	<u>Filter</u>
1	B/W Plus-X (2402)	25A
2	B/W Plus-X (2402)	58
3	Color Infrared (2443)	15 + 30 m
4	B/W Infrared (2424)	89B

The imagery collected on July 23, 1972, was digitized utilizing the Signal Analysis and Dissemination Equipment (SADE) at the Remote Sensing Institute (Figure 12). Seven sets of digital data were obtained. One set each for the black and white films and 4 sets from the color infrared film. The digital data were related to the ground data by correlation and regression analysis. Both density slicing and pattern recognition approaches were used for extrapolation from the test site to an adjoining similar pasture. A ratio of ERTS-1 imagery (MSS 5 and 7) was utilized to search for a vegetative index or estimate of herbage yields.

The linear correlation coefficients between the film data and ground data are shown in Table 7. Herbage yield (lbs. of dry matter per acre) was significantly related to film density for the color infrared film and



SADE was designed as á state of the art data analysis system with a highly flexible modular design. In the independent off-line mode the system provides monitor display of digital film or analog tape data and transmission of analog information to the film printer. When on-line with the computer, the system provides transmission of digitized image data and analog tape data to the computer and transmission of data stored or transformed in the computer back to the display monitor or the film printer. The system is composed of the following components:

- Image digitizer (image dissector tube)
- 2. Data control and conversion unit
- 3. Lockheed 417 seven track analog tape recorder
- 4. Daedalus film printer
- 5. Band pass filters

Red - .59 - .70µm

Green - .47 - $.62\mu m$

Blue - $.36 - .50 \mu m$

Figure 12. Signal Analysis and Dissemination Equipment.

Table 7. Correlation Coefficients from Analysis of Field and Film Data for Pasture #1

		EK-IR				B/W	
	z	œ	5	8	28	25A	898
Depth of A Horizon	36**	22	42**	41**	**94.	.23	.16
Slope	**89*	. 53**	**19.	**09`	** 44**	24	07
Organic Matter	09	.01	10	20	01	.04	18
Reflectivity	.32*	.26	*30*	**04.	28*	-,19	.13
Condition	27	22	-,19	15	*30*	*38*	.28
Yield	52**	37**	-,48**	-,36*	.52**	.53**	,18

Significant at .05 level (>.279)

** Significant at .01 level (>.362)

black and white films with 58 or 25A filter but not with the black and white infrared film. The relationships between film density and herbage yield were not improved by multiple correlation analysis or by the use of transformations of the digital data.

The classification of range site is illustrated in Figure 13. The k-class technique is based upon pattern recognition analysis of training samples for each class. The interactive classification is based upon a visual evaluation of the digital printout. One band or set of digital data was adequate for classification. Results were displayed on the color television monitor of the SAF system (Figure 13). The best equation for estimating yield was yield = 9931.3 - 62.5 (output code of EK-IR film - no filter). Utilizing this equation based upon the detailed test site, the mean yield was 1744 lbs/acre which compare favorably with the estimated mean yield from ground observations of (1830 lbs/acre). This type of extrapolation is limited by sun angle and vignetting effects inherent with low-altitude photography.


ERTS-1 data (bands 5 and 7) were digitized from $9\frac{1}{2}$ -inch transparencies and ratioed. The ratioed (5/7) data were most sensitive to vegetative differences and demonstrated a strong inverse relationship to ground cover (Figure 14). Within a general area of similar soils and range sites, this index is a good measurement of vegetative cover.

In addition to Remote Sensing personnel, five specialists³ from the Bureau of Indian Affairs are involved. The Bureau of Indian Affairs furnished approximately four man-months of work plus travel to this effort.

Water Resources Planning

The Bureau of Indian Affairs is presently authorizing funding for comprehensive water resource planning on Indian reservations. The Rosebud Reservation is developing a comprehensive water resources plan and has enetered into a contract with a private consulting firm to update and

³ R. Carey, Area Soil Scientist, C. Reed, Range Scientist, C. Owens, Range Conservationist, J. Warkentin, Soil Scientist, R. Williams, Soil Scientist.

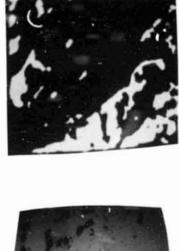

Interactive

brown-silty and overflow yellow-shallow and thin upland



K-class

yellow-silty and overflow blue-shallow and thin upland






Figure 13. Classification of range site for Pasture 1.

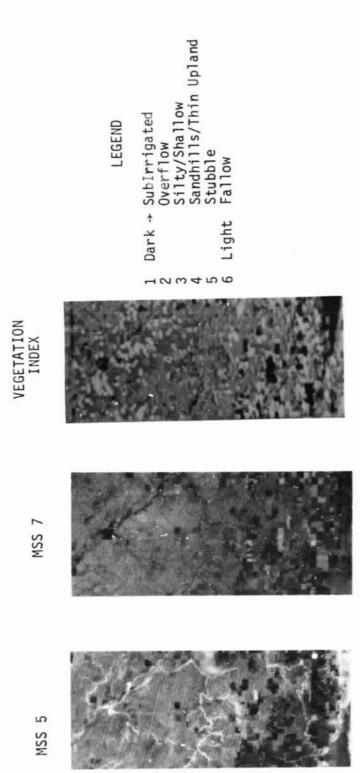


Figure 14. Vegetation index with six classes derived from ratioed ERTS-1 data.

compile all basic resource data for the reservation. The Remote Sensing Institute has entered into a contract with the private consulting firm to provide ERTS-1 interpreted soils, land use, and irrigation development data. The techniques employed to prepare these inventories were developed under RSI's NASA grant.

Prints at a scale of 1:250,000 from color composite transparencies, band 5, and band 7 ERTS-1 imagery were mosaiced for interpretation. Soil, land use, and irrigation development (Figure 15) were interpreted from ERTS-1 imagery and transferred to the 1:250,000 USGS topographic map of the area.

The soils and land use data will be used to evaluate potential sites for water resources development on the reservation. The use of ERTS-1 imagery has allowed the extrapolation of resource data from known to unknown areas. This extrapolation approach is applicable to other Indian reservations which will be developing comprehensive water resources plans.



Irrigation development on Rosebud Reservation Area, South Dakota interpreted from ERTS-1 imagery.

Band 5 Scale 1:1,000,000 16551 August 17, 1972 Figure 15.

ADDITIONAL STUDIES OF REMOTE SENSING APPLICATIONS

Tornado Damaye Assessment

On July 23, 1973, a tornado severly damaged approximately 20 city blocks in Pierre, South Dakota. On the morning following the storm the Remote Sensing Irstitute aircraft was flown to Pierre to collect aerial vertical and oblique photography. Supplemental ground photography was also collected.

The photography was processed at the Remote Sensing Institute photo lab and provided to the Civil Defense Office in Pierre. Excellent photographic coverage was obtained. Storm damage is clearly evident as shown in Figure 16 which is an example of the aerial imagery obtained.

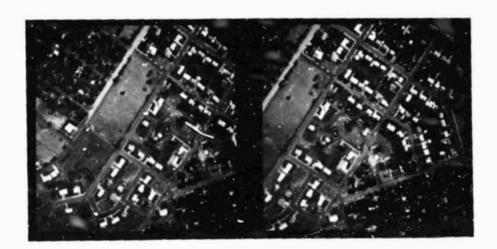


Figure 16. Color infrared aerial photography illustrating ability for assessing tornado damage. Film 2443, filters 15 and 40M, altitude 450 meters (1500 feet), Hasselblad camera with 50 mm lens.

The use of remote sensing data for assessing and scheduling storm cleanup operations includes the following:

- a. determining extent of area damaged
- b. directing debris clearance
- c. routing traffic
- d. determining damage to utilities
- e. estimating damage to structures
- f. determining temporary housing requirements
- g. others.

The letters from the office of the South Dakota Civil Defense (Appendix C) indicate that remote sensing imagery is useful for planning and directing cleanup operations. It is expected that this remote sensing operation, along with the one covering the Rapid City flood in 1972 (SDSU-RSI report 72-11), will lead to formation of a contingency plan by the State Civil Defense Agency for calling on the Remote Sensing Institute for immediate remote sensing coverage of disasters for evaluation and planning purposes.

A field investigation report entitled Remote Sensing for Evaluating Post-Disaster Damage Conditions, SDSU-RSI-74-2, was completed on this subject and submitted to NASA in August 1974.

Hail Damage Evaluation

During the 1973 growing season, the Plant Science Department at the South Dakota State University was engaged in a controlled study of simulated hail damage on oats. This study presented an opportunity to observe and record radiation changes as the crop matured and as simulated damage was imposed. Therefore, a cooperative effort was established between the Plant Science Department and the Remote Sensing Institute. The radiation change data were recorded on three different dates using an Exotech radiometer filtered in the same wavelength bands as that recorded by ERTS-1. A second Exotech radiometer was used to measure incoming radiation simultaneously with the reflected radiation so that net differences can be determined. These data have been partially analyzed with some indication of significant results.

In addition to the above studies, natural hail damage reports were carefully monitored to find an occurrence which coincided closely with an ERTS-1 overpass. On July 1, 1973, heavy hail caused extensive damage in an area near Pollock, South Dakota. Hail stones about an inch in diameter were reported. News reports said crops were completely destroyed in an area about 10 miles wide and 15 miles long east of Pollock, South Dakota.

Figure 17 is a photograph of an ECTS-1 (July 8, 1973) band 5 mosaic on which areal hail damage was interpreted. Band 5 presented the most contrast for interpretation; however, bands 4 and 6 also showed some reflectance changes. The reflectance changes were not as apparent on band 7. The broken line on Figure 17 outlines an apparent reflectance change which was interpreted as hail damage. The solid line represents the hail damage boundary line as determined by field personnel from the Westher Control Commission at Pierre, South Dakota. The field personnel established the damage boundary line by ground observation and interviews with the farmers. The severly hail-damaged areas appear to be visually interpretable on ERTS-1. Areas determined by ground evaluation to have medium to light damage were not visually interpretable. It is hoped that the results of the controlled experiment will lead to data analysis techniques that will improve the interpretability of ERTS-1 to include medium to light hail damage assessment.

Contact has been established with the Hail Insurance Adjustment and Research Association and a briefing of our work has been presented to them. They have shown a considerable interest in what has been done since a grost quick estimate of extensive crop damage would be valuable to them. Present delays in receipt of ERTS-1 imagery would make a quick assessment of damage infeasible; however, continuation of the development of such a capability is important for use when satellite imagery closer to real time does become available.



Photograph of band 5 ERTS-1 mosaic with illustrated hail damaged area. Broken line encircles area determined by ground evaluation. Figure 17.

Data Analysis

The K-class report SDSU-RSI 73-08 was completed during this period of time. An appendix was also written which describes K-class. This appendix may be attached to and used to acquaint readers of reports in which K-class is used as the classifier to the decision processes.

An appendix was written to describe a mode-seeking procedure referred to as MODE1. The purpose of this appendix is similar to the K-class appendix. The MODE1 computer program and a procedure which uses the MODE1 results to train the K-class classifier is included in SDSU-RSI report 73-11. In addition a MODE2 computer program was corrected and made operational.

As an alternate approach to Robert's gradient for edge and line detection, and for low signal-to-noise ratios situations, the study of U. Montanari's article "On the Optimal Detection of Curves in Noisy Pictures" was pursued. It appears that the work done to detect lines and edges by Montanari could well provide a very useful tool to aid land use planners and others concerned with boundaries between different geologic, crop and soils boundaries.

The work that could be done to improve the recording of the image which contains lines and edges, and to evaluate Montanari's algorithm in low signal-to-noise environments is:

- 1) Generate line images with additive Rayleigh noise
- 2) Display these images on the SADE system monitor. This will provide a realistic human interpretation as to the signal-to-noise ratio which is detectable by the eye, and to compare the human results with the algorithm. This has not been done by Montanari in his paper. Only computer line printer outputs have been used
- 3) Program Montanari's algorithm on the IBM computer
- 4) Apply the algorithm to images currently under study by other investigators and evaluate the usefulness of Montanari's algorithm to aid these investigators in determining boundaries.

To improve the recognition accuracy of soil types, it was decided that spatial feature extraction techniques should be programmed for use on the IBM system. Computer programs of the two dimensional fast Fourier transform, the Binary Fourier Representation (BIFORE) and slant transforms were received from L. Kirvida of Honeywell Inc. N. Ahmed of Kansas State University also supplied his version of the two-dimensional BIFORE algorithm. Each of these algorithms has been useful to extract spatial features. Time did not permit the evaluation of these algorithms to see whether the use of spatial features improved the classification accuracy of soil types.

The use of the coherence function has been useful in communication systems and should be used to determine spatial frequency features in images. The computer program to extract the coherence function from one-dimensional fast Fourier transform frequency data was developed. Again the lack of time did not permit evaluation of the usefulness of the coherence function. This area of study should be pursued.

A Map of Soil Textures and Land Forms on ERTS-1 Imagery

The Brookings County Map of "Soil Textures and Land Forms on ERTS-1 Imagery", (Appendix D) contains information pertaining to soil pH, organic matter content, and potassium and phosphorus in ten soil areas in the county. The general soil textures and land form areas are delineated on an ERTS-1 image.

The Brookings County map includes soil factors needed for determining herbicide application rates and the status of certain soil nutrients. The principal utility of the background soil information combined with the ERTS-1 image is in its use by farmers, county agents and other advisors, and by aerial or ground applicators, in their operations.

The soils information has been available previously but never in this unique form which makes it so convenient to interpret and use. Applicators, farmers, and others can pick out individual farms on the ERTS-1 imagery and quickly determine specific information pertaining to that farm and others

in the same soil association area.

Information related to farming practices, to availability of ground water, to land sales values, to land use and land use planning, and other information can be inferred from the county ERTS-1 map.

Many environmental variables including soil factors affect the performance of soil applied herbicides. Soil texture, organic matter and pH are important criteria. Soil test results provide accurate indications of these factors.

The application rate for many soil-applied herbicides is based on soil texture and organic matter. Excessive rates result in needless expenditures of product, adding unnecessary amounts of pesticide to the environment, and can result in crop injury. Insufficient rates means "wasted" expenditure for product purchased if weed control is unsatisfactory. Many product labels and recommendations include a table as shown below. This indicates the importance of knowing soil texture and organic matter.

	**************************************	.bs. "Lexone" Per	Acre ¹
Soil Texture*	え to 2% Organic Matter	2 to 4% Organic Matter	More than 4% Organic Matter
Loamy sand, sandy loam	Do Not Use	3/4	11
Loam, silt loam silt, sandy clay, sandy clay loam	3/4 to 1	1 to 1½	1½ to 1½
Silty clay, silty clay loam, clay, clay loam	1 to 14	1¼ to 1½	1½ to 1 3/4
Mississippi Delta Only	11/4	1 3/4	2

^{*} Do not use on sand nor on soils with less than ½% organic matter as crop injury may result.

Soil pH is important in some situations. High pH is associated with crop injury with some herbicide treatments. A limited number of products should not be used on soils having pH's higher than specific stated values. These values may vary within fields, however, data from an area are helpful

¹ From "Lexone" label for metribuzin on soybeans

in predicting where problems may be more prevalent.

Growers can obtain the most precise soil information from individual field test results, however, more general information from larger areas is helpful to dealers, applicators and industry personnel. It is helpful in determining general use patterns within areas and in identifying areas where performance problems might be expected. Proper consideration of these factors can prevent problem occurrences, thereby eliminating crop losses due to poor performance or crop phytotoxicity.

In view of the above, it would appear that maps of this type, using ERTS-1 imagery as a base, could prove to be very holpful. Similar maps could be produced for other counties and could perhaps be modified to show other specialized information as required. The important aspect of this application of ERTS-1 imagery is that it is utilized to present available information, in an easily applicable manner, to users for practical purposes. An aerial applicator for example, may not take the time to look up soils information existing in tabular or narrative form, but he may very well make a direct application of the same information which is conveniently displayed on an ERTS-1 base map.

It is recommended that continuing efforts be made to adapt existing and newly discovered information to presentation on ERTS-1 base maps for convenient and practical use in operational situations.

The Soils Textures and Land Forms Map of Brookings County was sent to the South Dakota Congressional Representatives. The replies (Appendix E) indicate their interest in this usage of ERTS-1 imagery.

A Map of Soil Association Value Areas

A Map of Soil Association value areas was completed in November, 1973. Three groups cooperated to prepare the map: (1) soil survey researchers from the South Dakota State University Agricultural Experiment Station and the USDA Soil Conservation Service who prepared the Soil Association separations; (2) the Directors of Assessment and the South Dakota Department of Revenue officers who compiled the land sales of unimproved agricultural land by Soil Associations; and (3) the South Dakota State University Remote Sensing Institute, and the National Aeronautic and Space Administration contract No. NASA-ERTS NAS5-21774, who furnished and prepared the ERTS Base Map from satellite imagery upon which Soil Association Value Areas are drafted.

The ERTS mosaic used for the base map was complied from scenes taken in May and June 1973. The imagery consists of negative prints from Band 7 of the multi-spectral scanner aboard the ERTS satellite. To prepare a base map of South Dakota using Conventional Aerial photographs, it is estimated that 30,000 separate photographs would be necessary, costing about \$250,000. The ERTS base map used was complied using only 20 ERTS scenes at a far more reasonable cost.

The Soil Association Value Area Map is included in this report at Appendix E. The map legends included are such that the user can readily interpret the information displayed.

LITERATURE CITED

Anderson, J.R., E.E. Hardy, and J.T. Roach. 1972. A Land-Use Classification System for Use With Remote-Sensor Data. Geological Survey Circular 671.

Frazee, C.J. and R.L. Carey, 1972. Remote Sensing of Indian Lands in South Dakota. SDSU-RSI-72-12. South Dakota State University. Brookings, South Dakota.

Frazee, C.J., V.I. Myers, and F.C. Westin. 1972. Density Slicing Techniques for Soil Survey. Soil Sci. Soc. Amer Proc. 36:693-695.

Frazee, C.J., P.H. Rahn, F.C. Westin, and V.I. Myers. 1974. Use of ERTS-1 Imagery for Land Evaluation in Pennington County, South Dakota. Proc. Ninth International Symposium on Remote Sensing of Environment. April 15-19, 1974. Ann Arbor, Michigan.

Myers, V.I., F.A. Waltz, and J.R. Smith, "Remote Sensing for Evaluating Flood Damage Conditions", The Rapid City, South Dakota Flood, June 1972. RSI-72-11.

Radeke, R.E. 1971. Soil Survey of Shannon County, South Dakota. USDA Soil Conservation Service.

Westin, F.C. and D.L. Bannister. 1971. Soil Associations of South Dakota. AES Info Series No. 3. South Dakota State University, Brookings, South Dakota and USDA Soil Conservation Service, Huron, South Dakota.

Westin, F.C., M. Stout Jr., D.L. Bannister, and C.J. Frazee. 1974. Soil Survey for Land Evaluation in South Dakota. To be published in Fall, 1974. Assessors Journal.

PUBLICATIONS COMPLETED DURING GRANT PERIOD

- Benson, L.A., C.J. Frazee, and V.I. Myers. 1973. Land Classification of the Lake Dakota Plain in South Dakota with Remote Sensing Methods. SDSU-RSI-73-13. Remote Sensing Institute. South Dakota State University, Brookings, South Dakota.
- Benson, L.A., C.J. Frazee, and F.A. Waltz. 1973. Analysis of Remotely Sensed Data for Detecting Soil Limitations. Proc. of Conference on Machine Processing of Remotely Sensed Data. October 16-18, 1973. LARS, Purdue University. West Lafayette, Indiana.
- Benson, L.A., C.J. Frazee, F.A. Waltz, C. Reed, R.L. Carey, and J.L. Gropper. 1973. Remote Sensing Techniques for Mapping Range Sites and Estimating Range Yield. SDSU-RSI-73-19. Remote Sensing Institute, South Dakota State University, Brookings, South Dakota.
- Frazee, C.J., P.H. Rahn, F.C. Westin, and V.I. Myers. 1974. Use of ERTS-1 Imagery for Land Evaluation in Pennington County, South Dakota. Proc. Ninth International Symposium on Remote Sensing of Environment April 15-19, 1974. Ann Arbor, Michigan.
- Frazee, C.J., R.L. Carey, and F.C. Westin. 1973. Evaluation of ERTS-1 Imagery for Use on the Pine Ridge Reservation. SDSU-RSI-73-10. Remote Sensing Institute, South Dakota State University, Brookings. South Dakota.
- Kaveriappa, G.K. and G.D. Nelson, "Unsupervised Iterative Clustering in Pattern Recognition", Interim Technical Report, May 1973. SDSU-RSI-73-11. (Submitted to NASA under Grant NGL 42-003-007). Remote Sensing Institute, South Dakota State University, Brookings, South Dakota.
- Myers, V.I., and A.E. Rusche, "Remote Sensing for Evaluating Post-Disaster Damage Conditions". SDSU-RSI-74-2. Submitted to NASA in August 1974. Remote Sensing Institute, South Dakota State University, Brookings, South Dakota.
- Serreyn, D.V. and G.D. Nelson, "The K-class Classifier", April 1973. (Submitted to NASA under Grant No. 42-003-007) SDSU-RSI-73-07. Remote Sensing Institute, South Dakota State University, Brookings, South Dakota.
- Westin, F.C., The Brookings County Map of "Soil Textures and Land Forms on ERTS-1 Imagery". Remote Sensing Institute, South Dakota State University Brookings, South Dakota.
- Westin, F.C. Soil Association Value Areas on ERTS Mosaic of South Dakota. Publication No. AES Info Series No. 5, November 1973. No. SDSU-RSI-73-17. South Dakota State University, B. kings, South Dakota.

APPENDIX A

Director of Equalization

Gettysburg, South Dallota 57442

19 Hovember 1073

Director, Property Tax Division Pierre, South Dakota

Dear Mr Winkler;

Reference the EECS presentation by Doctor Weston and Doctor Frazee at our recent annual convention.

This County would like you to make the necessary contact with the proper Emilvidual to determine Cost and procedure for us to obtain a colored print, and plastic overlays as displayed on the one county. Further we are also interested in having the same study accomplished on this County, as Doctor France is doing on Fennington County. Please obtain this cost for us.

This letter comminated with Mr. A. L. Rogers, Chairman Potter County Commissioners.

CC: County Intrissioners

Dorgan Director of Equalization

REPRODUCIDILITY OF THE ORIGINAL PAGE IS POOR

BROWN COUNTY DIRECTOR OF EQUALIZATION

ABERDEEN, SOUTH DAKOTA 87401

Movember 19, 1973

Mr. George Winckler Director of Property Tax Planne, South Dakota 57501

lear Mr. Winckler:

Brown County Commissioners, moved and passed motion, November 19, 1973 to find the cost of ERTS colored pictures and particularly of Brown County.

Sincerely yours,

Chilles - sen

Alberta Jactison Brown County Director of Equalization

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

APPENDIX B

July 10, 1974

Mr. Joe A. Vitale, Chief Engineering Systems Design Branch Office of University Affairs NASA Code Y Room 6125 400 Maryland Ave. S. W. Washington, D. C. 20546

Dear Mr. Vitale:

Dr Fred C. Westin suggested that you may be interested in some of the work initiated in South Dakota exploring methods in which ERTS imagery may improve or accelerate our soil survey program. In March, I forwarded black and white ERTS imagery at 1:1,000,000 and 1:250,000 scales, Band 5 and Band 7, to selected soil scientists. The purpose as cutlined to them was to keep ourselves up to date on the type of data that is available, and to seriously review and study the imagery for any methods in which it may assist us in our soil survey program or land use interpretations. Some of the things we suggested for consideration were:

- 1. Refiring or sharpening of our general soil association areas
- 2. Would it assist us in outlining general areas of different soils that do not seem to appear on our present photography; for example, would it help us separate some of our silty drift areas or geologic areas that may be reflected in our soil survey delineations?
- 3. Broader vegetative or land use patterns that may be indicative of soil patterns.
- 4. The possibility of using the ERTS background at a 1:250,000 scale for more impressive demonstration, educational, or informational uses.

The ERTS imagery was furnished us by the Remote Sensing Institute at Brookings. We hope to follow up this project with some 1974 ERTS imagery for study by field soil scientists. The Remote Sensing Institute also has furnished us a few selected color composites which will be evaluated.

I am attaching copies of the original comments received from our field soil scientists. Our soil survey staff has not yet appraised or followed up with our soil scientists on this project. This will be done this winter. In

some cases, we plan for personnel of the Remote Sensing Institute to work with our people on interpretation of this imagery. I appreciate the excellent cooperation of the personnel of the Remote Sensing Institute and Plant Science Department at South Dakota State University in working with this data.

I believe it is evident that in some counties the imagery will assist us in more accurately delineating broad soil areas in addition to other features as geologic areas and land use patterns. Before drawing any conclusions for use in soil survey, it is necessary that we follow up with our soil scientists during FY 1975.

Sincerely,

D. L. Bannister State Soil Scientist

Attachments

The state of the s

Lon Containment Carvica

•-		A CANA	
-	1.1.108		19 19
1 . 7)
's suither			
7: 4-40			
-			
:			

April 16, 1974

To:

Non Bannister, State Soil Scientist

Soil Conservation Service

Minron, S. Dait.

From:

Men Miller, Soil Scientist The

Soil Conservation Service

Milbank, S. Dak.

Subject: Soils - 16 - Techniques, ERTS Imagory

As requested, I have worked with the imagery coverage of Grant County, and have a few comments on this.

- 1. With prior knowledge of the area, a fairly accurate Soil "association map can be made, however, some areas are not well enough defined to use for sharponing up boundaries. Some of the gravel areas and the alluvial soil areas are not well enough defined to make accurate boundaries. Also, the boundary of the silty drift area is not well defined.
- 2. The imagery could be of some benefit in soil survey work as it shows the geologic areas, hand use patterns, and in turn the kinds of soils one would expect to occur.
- 3. A soil association map developed on this background at 1.250,000 would be of some value for educational and informational uses.
- 4. The finagory could be of some value whom starting a new survey area.

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

ce - A. Mayno Pops, A.C. Soil Connervation Service Watertown, S. Dali.

.

 \mathcal{O}

won Banniste, State Soil Accentist, 5 CS gluron, 5.5. 2 find the photos interesting but, sea anyland and remained in a quate aris I drawing system, (small) timb

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

Salem, South Dakota 57050

SUEJ: SOILS - INIS Imagery

DATE: March 22, 1974

TO: Donald L Dannhover, Stave Soil Scientist Soil Conservation Jermice Haron, South Dakova 57350

I have studied the INTO imagery for McCook County and adjacent areas and have found it to be useful. In general the May imagery is sharper and has more detail than the October imagery for both bands and scales. I have the following comments on the imagery:

Part 7 (5 - 0.9 micron) 1:1 000.000 scale: This imagery is very useful for getting an overall perspective of the southeast corner of the state. The major drainage patterns are detectable along with cultural features such as Interstate 90 and 29 and Cavins Point Dam. This imagery is of little use for a single country except for comparing it to adjacent areas. It may be useful in Lincoln and Union counties where the loess areas are easily discernible and can be separated from the silty drift areas. There also seems to be a diffuse boundary between the silty drift and glacial till areas.

The May imagery is much clearer and shows more drainage detail when the Goudber imagery. The major geologic areas, however, are prominent on both sets of imagery.

I am pleased with the detail on this imagery and would appreciate followup sets of it.

Band 7 (0.8 - 0.9 micron) li250.000 scale: This imagery is more useful on the county level. The drainage pattern and cultural features are visible but towns are not detect; ite. The Glarno-Ethan-Tetonic soil association is very prominent and can easily be deliceated on this imagery. All other soil associations, except for the alluvial soils, have similar patterns or film contrasts. Perhaps if film densities were color encoded, the other soil associations may be discernible. The Hand-Clarno-Ethan association appears to be lighter in some areas but this is very abstract and impossible to separate on this imagery.

I would appreciate color composites of this imagery and also any following sets that become available. I, too, believe this imagery makes a good background for the general soils map of the county.

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR



Berd 5 10 6 - 0 7 minman) is 250 000 sapile: This imagery coupled when the zero 7 images and very useful on the county level. Draining is more prominent on the Band 7 imagery, but cultural features are more prominent on the (May) Band 5 imagery. Towns appear as difful dank around. The October imagery is unclear and seems to have some cloud cover.

The Claimo-Dimen-Storica association is prominent and can be delimeded on this imagery. The Nand-Clarmo-Ethen association can be separated from the Clarmo-Prosper association west of the Vermillion River, but cannot be separated elsewhere in the county. I believe a color composite of this imagery would be very helpful for delimeating soil associations.

To summerize.

- 1. The 1:1,000,000 scale, Band 7 imagery shows the overall view of the drainage network and helps to delineate geologic areas of a section of the state. It helps in placing a particular county in perspective with the drainage network and geologic pattern.
- 2. The 1:250:000 scale, Eand 7 imagery shows the drainage pattern better than Band 5 and may aid in delineating soil associations within a country.
- 3. The 1:250,000 scale, Eard 5, imagery shows cultural features better than Band 7. To, too, may help in delineating soil associations within a country.
- 4. I believe color composites of the 1:250,000 scale would be helpful in making general soils maps. I would appreciate this imagery if it is available.
- 5. The May imagery is sharper and has more detail than the October imagery for both Bands. The October imagery, however, appears to have some cloud cover which may obscure the land pattern.

I would appreciate receiving any followup sets of imagery.

Minice of Mandon

INTEREST OF MEUSEAGN Soil Scientist

.cc-Robert D. Richter, Area Conservationist, SCS, Sioux Falls, South Dakota

COLL CONCERNATION CONTROL

•		. 4	<u> </u>	
111		. 1,		<u></u>
ination !		1		!
Yaveday !		1		<u> </u>
Red che				<u> </u>
-	1	- 1		<u> </u>

Sile - 16 - Techniques, ERIS Imagery

DATE: 3- 25-74

Dan Bannisha State Soil Scientist SCS HOURS

> I have reviewed the Copies of ERTS ineapery that was sont covering fanktin and surrounding eventure. In shulging these I have observed the bollowing:

Bund 5 slucis

- Bothens of James River
- Wet was along turkey . Chang dital
- Course testand soils along Hissouri

Band 7 Skows -

- Fireder along tame Hissouri tarkey Chy
- Water auca including when thereare R. 12 Stablized.
- Alfelta Leelles very numerous in Missouri R.

If it is possible, would like copies of imaging from this senson to compare with there and own Alla She will be getting. I understand that bund 5 is in the visible rad and bund 7 is ware intravial which bearter these photos in a different part of the spectour from our normal plategraphe Itill would be interesty to company loon through patterny ac: Rabait Belin, 110

•	 	
-	1	
English.	1	
Z.ve.iv	1	
1: .35	1.	<u> </u>
-	1	

SUPPERTY SOILS - Evaluation of ERTS Imagery

DATE: 3-20-74

TO:

· D.L. Zannister, state ecil scientist Ses Huren, So. Dell. 57250

REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR

In studying the four ERTS thetes which you sent, the most noticeable thing is that the photos taken in may, 1972 are much clearer and show more detail than the thetes takin in oct, 1972. Also, the scale of 1:1000,000.

Using the spring flight cet scale et 1:250,000 I was able to distinguish the creas of 7% of the 11 Gen. Soil issoc. areas as I have suparated them on a country higher may. The british land areas and the areas of the Crefton-higher Alcester Assoc. stand out the most. At an even larger scale the Gen. Soil Assoc. areas might show up even better and would make In impressive background for a Gen. Soil May overlay.

The Ept plates, I believe, could certainly help to it in gregaring Gen. Sil major in Tourisies where there are no detailed soil surveys. However, the Gen. Soil Moje prebably could be more accorditely prepared using the Soil survey field sheets where good detailed soil surveys are available.

James L. Driessen, soil scientist

all Robert D. Renter, Ac. Sieux Falls



chitte others but himbert of Acribulture

CALTON, S. D. 570/S

SUBJECT: SCILS-ERTS IMAGENT, Linion Co.

DATE: 5-2/-74

TO: D. L. Bannister, State Soil Scientist SCS, Huren, Sc. Dak. STESO

For your information I am sending a Gen. soil map. overlay flaced over an Exits photo of Union County. Please return this material to me after you have reviewed in.

The overlay is a tracing of the soil Assoc. Sundaries as gresently brown on the Highway map. The lines have not set been terined to match the ERTS Imagery. This I will be at a later time.

Assuming the scales of the highway map and ERTS photo are the same, the will notice that the missouri and Big Side River channels have changed considerably since the highway map was drafted, or the map is not accurate.

when the everlage is placed on the ERTS photo, most of the Gen. soil respectations can easily be seen on the ERTS image, and it is evident that some of the lines can be refined somewhat. With some more study of the ERTS photo, resibly the Gen. seil may can be improved tonsiderably.

Junes J. Dhissen Soll Scientist REPRODUCIBILITY OF THE ORIGINAL PAGE IS POOR



APPENDIX C



RICHARD F. KNEIP

GOVERNOR

STATE OF SOUTH DAKOTA OFFICE OF THE ADJUTANT GENERAL

STATE CIVIL DEFENSE



STATE EMERGENCY OPERATIONS CENTER

STATE CAPITOL BUILDING

PIERRE, SOUTH DAKOTA 57501

MAJ. GEN. DUANE L. CORNING DIRECTOR THE ADJUTANT GENERAL

30 July 1973



Victor I. Myers, Director Remote Sensing Institute South Dakota State University Brookings, South Dakota 57006

Dear Mr. Myers:

Thank you very much for the copies of photos taken by your Institute showing the damaged areas in Pierre on the July 24, 1973, tornado.

I am sorry that we did not advise you so that you had immediate knowledge of the tornado, however, we will certainly attempt to do this in all future incidents such as this and hopefully allow you more planning time for accomplishing such a mission.

These photos are very beneficial in determining the scope of damage and you can be assured that we appreciate it immensely.

Sincerely,

JOHN F. POWELL

Deputy Civil Defanse Director

for South Dakota

JFP/st



RICHARD F. KNEIP

GOVERNOR

STATE OF SOUTH DAKOTA

OFFICE OF THE ADJUTANT GENERAL



STATE **DEFENSE** CIVIL

STATE EMERGENCY OPERATIONS CENTER

STATE CAPITOL BUILDING

PIERRE, SOUTH DAKOTA 57501

19 November 1973



Mr. Victor Myers Remote Sensing Institute Harding Hall South Dakota State University Brookings, South Dakota 57006

Dear Mr. Myers:

After the Black Hills flood of June 9, 1972, your Institute compiled a document of photos valuable in damage assessment immediately after the flood and important in delineating the flood plain area for long-range flood plain wanagement.

Again as a result of a small tornado in Pierre this year the imagery provided assisted a great deal in identifying the path of and damage caused by this incident.

As a result of these two specific cases, and the uses to which the photos assisted in damage assessment, identification of the hazard areas and longrange planning, we would hope that your Institution could continue to provide this service in the event of future disasters.

Sincerely,

Deputy Civil Defense Director

for South Dakota

JFP/st

APPENDIX D

Soil Textures and Land Forms on ERTS-1 Imagery

AES Info Series 8 June 1974 (Revised)

Remote Sensing Institute, South Dakota Brookings. ment, Agricultural Ev.periment Station, and State University, Plant Science Depart**EP.T.S** image of 17 June 73. Negative print of Band 7 reflects white, bare soil very light gray, actively growing vegetation dark gray. Infrared. Water

SCALE: 1:250,000 (1 inch = 4 miles)

- Roads

State of South Dakota and NASA University Affairs Office, Grant 42-003-007 runded in part by the

South **Brookings** Dakota County,

I-Silty Clay Loams (undulating upland with marshes and

2-Silty Clay Loams and Loams (rolling upland with marshes

Use of this soil information discussed on reverse side.

and depressions).

3–Silly Clay Looms (sloping upland with stream drainage).

4–Sily Clay Looms (flat terrace, gravel substratum).

5–Silty Clay Loams and Clays (flat bottomlands, often wet,

with variable depth to gravel).

6-Loams (sloping upland with stream drainage, may

7—Loams (flat terrace, gravel substratum).

8—Loams (hilly or steep uplands).

9—Loams (undulating upland with marshes and depressions).

10—Sandy Loams and Light Loams (sloping upland with stream

drainage).

APPENDIX E

OPPICE ADDRESS:
1321 HOUSE OPPICE BUILDING
WASHINGTON, D.C. 20515
TELEPHONE; (202) 225-2801

DISTRICT PIELD OFFICES:
418 FOURTH STREET
ROCKINGS SOUTH DAKOTA 57006
TELEPHONE (605) 694-4572

400 South Phillips Avenue Shour Falls, South Dakota 57172 Telephone, (605) 335-2860 FRANK E. DENHOLM

Congress of the United States

House of Representatives

Washington, P.C. 20515

September 19, 1974

Mr. Victor I. Myers, Director Remote Sensing Institute South Dakota State University Brookings, South Dakota 57006

COMMITTEE ON AGRICULTURE

GUBCOM MITTERS

LIVESTOCK AND GRAINS

DOMESTIC MARKETING AND CONSUMER RELATIONS

DEPARTMENT OPERATIONS

ADMINISTRATIVE ASSISTANT

MR. ARTHUR O ANDERSON

Reurlet 9/13/74

Dear Victor:

I acknowledge with gratitude the receipt of your above referenced letter together with a map of soil textures and land forms on Earth Resources Technology Satellite (ERTS-1) Imagery of the County of Brookings, South Dakota.

I have reviewed the enclosures with interest and I commend you and your associates on an excellent presentation of the vital services of ERTS-1 Imagery to the industry of Agriculture.

I am forwarding a copy of the enclosures to my good friend the Honorable W. R. "BOB" POAGE, Chairman of the House Jommittee on Agriculture for his information and evaluation of the essential services of ERTS to rural America.

It was thoughtful of you to write to me as you did and I welcome your advice and counsel on all future matters of mutual interest.

Thank you very much.

Sincerely,

FRANK E. DENHOLM, M.C.

FED/A/dc (3)

74-9-475

cc: Honorable W. R. Poage, Chairman (info. w/encls.)
House Committee on Agriculture
1301 House Office Building
Washington, D.C. 20515

United States Senate

WASHINGTON, D.C. 20510

September 24, 1974



Dear Mr. Myers:

Thank you for your recent letter.

I agree that the technology of the Earth Resources Technology Satellite will prove to be extremely valuable in the management of our natural resources.

With every good wish, I am

Sincerely yours,

George McGovern

Victor I. Myers, Director Remote Sensing Institute South Dakota State University Brookings, South Dakota 57005 JAMES ABDNOR 20 DISTRICT, SOUTH DAKOTA

WARHINGTON OFFICE: 1230 LONGWORTH BUILDING WARHINGTON, D.C. 20915 (202) 225-8165

DISTRICT OFFICES: 439 FEDERAL BUILDING, PIERRE (60°) 224-2891

507 KANSAS CITY, RAPID CITY (605) 343-5000

203 FARMERS AND MERCHANTS BANK BUILDING, HUROM (605) 352-5117

> 307 NORTH MAIN, MITCHELL (605) 996-3601

Congress of the United States

House of Representatives

Washington, P.C. 20515

September 30, 1974

COMMITTEES:
PUBLIC WORKS

ENERGY

WATER RESOURCES
ECONOMIC DEVELOPMENT
PUBLIC BUILDINGS AND GROUNDS

VETERANS' AFFAIRS

SUBCOMMITTEES: EDUCATION AND TRAINING HOSPITALS INSURANCE

PHILIP N. HOGEN
ADMINISTRATIVE ASSISTANT

Dr. Victor I. Myers, Director Remote Sensing Institute South Dakota State University Brookings, South Dakota 57006

Dear Dr. Myers:

Than vou very much for the ERTS-1 image of Brookings County and the anatory information which relates to its application. I know that providing information on soils is but one of a multitude of potential practical applications of satellite imagery.

I look forward to being of any assistance possible in the further development of remote sensing technology, and I look forward to your continued interest in keeping me informed in this regard.

apolina

Sincerely,

JAMES ABDNOR

Member of Congress


JA/adu

APPENDIX F


FOLDOUT FRAME

		## 1
	Perkins	
. Harding		Corson
1		
Profession of the same		
Butte		
	Meade	Ztebach
	1 3 3 7	
		200
	and the second	
Lawrence		
		5) 1 1
	THE STATE OF THE S	
Pennington · · · · · · · · · · · · · · · · · · ·		
		Jaskson -
	The same of the sa	

ERTS Mosaic of South Dakota

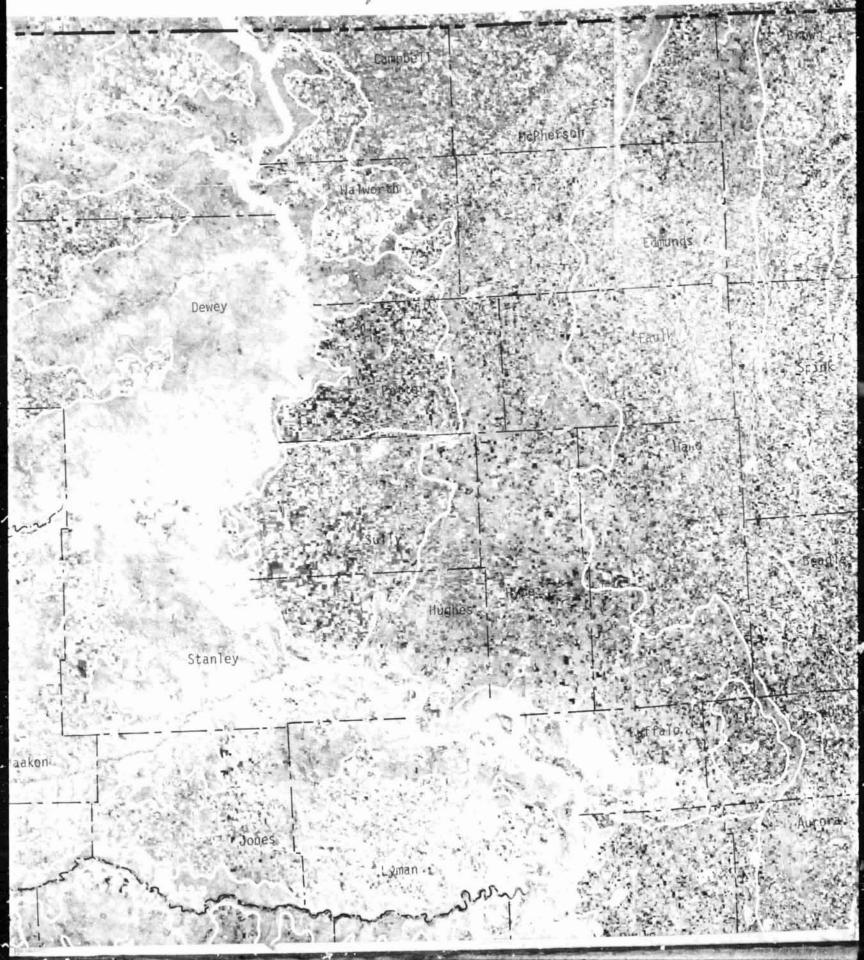

	and the A. Toront (PRO)	Design Training Control		-	
				大州	
	Marshark	$\sim 1 \sim 10^{-1}$			
	14.				
N. A			(
外点 点	ries /	7.4	1		
	34.7		Repair 85	A market	
			- 1-1-	1	
	Day				
A N				o Grant n	
	7 7 196		247	Maria de la companya dela companya dela companya de la companya dela companya de la companya dela companya de la companya de l	
	HAT WATER		codington		
1 10	Cfar				
			4. 1	jeuet .	
		Hamlin			90 62 82
55 m			38 187		
			1	rookings	
		A Kingsbury		位的	
** F 9	200				4
	9			1	
		1 S 2 1 1 1			4
and Sandt				Megasy	2
			And York		L
	and the second				1
			1		4
2000年末期 2000年2月		F-AS		MEHI - half	na it.
T.					
100	Hansen				354
小場合					Sec.

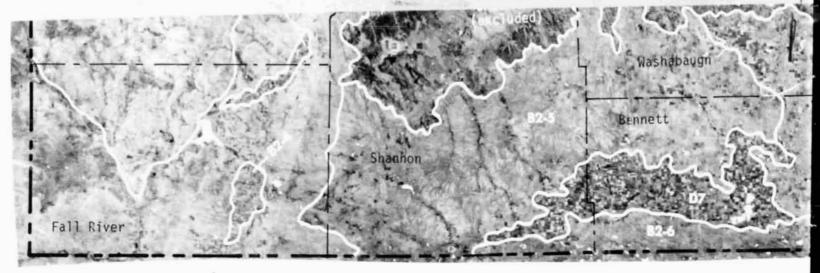

FOLDOUT FRAME


SOIL ASSOCIATION VALUE AREAS

Based on Major Land Use, 1967-72 Sale Prices of Unimproved Agricultural Land, (4,653 Sales), and Soils.

- A—Western Rangeland (\$15-\$20 average sale price per acre).
 - A1 Undulating, dense clays from Cretaceous
 - A2 Undulating, sandy loams and sands from Cretaceous sedimentary rocks.
- B1—Western Rangeland, with some Wheatland (\$20-\$25 average sale price per acre).
 - B1-1 Rolling loams and clays, some with claypans from Upper Cretaceous materials.
- B2—Western Rangeland and Wheatland (\$26-\$50 average sale price per acre).
 - B2-1 Rolling loams and clays mainly along valley sides from Upper Cretaceous materials.
 - B2-2 Strongly undulating clays on divides from Cretaceous shales.
 - B2-3 Steep clays along valley sides from Cretaceous shales.
 - B2-4 Undulating silty clays from Cretaceous shales and silts.

- B2-5 Rolling sandy loams and clays of the Pine Ridge from Tertiary materials.
- B2-6 Hummocky sands of the Sand Hills from Tertiary materials.
- C—Wheatland, Rangeland or Pasture (\$45-\$76 average sale price per acre).
 - C- 1 Undulating clay loams on western ter-
 - C- 2 Undulating loams on tablelands from Fox Hills Cretaceous materials.
 - C- 3 Undulating loams and sandy loams on broad stream divides from Cretaceous materials.
 - C- 4 Strongly undulating clays from Crctaceous shales.
 - C- 5 Strongly undulating silts and sandy loams from Tertiary materials.
 - C- 6 Undulating clays from Cretaceous
 - C- 7 Strongly undulating glacial loams from stagnant ice materials.
 - C- 8 Undulating silty clay loams from loess on residual plain.
 - C- 9 Steep clays on valley sides from Cretaceous shales.

- C-10 Hilly clays from Cretaces moraines.
- C-11 Hilly loams from glacial D—Grain Crops, general agriculta average sale price per acre).
 - D 1 Gently undulating silts from stagnant icc materi
 - D 2 Gently undulating loan loams from glacial till.
 - D 3 Undulating silty clay los nant ice materials.
 - D 4 Nearly level clay loams for
 - D 5 Undulating clays from shales.
 - D 6 Undulating sandy loams from Tertiary materials
 - D 7 Undulating silty clay lo lands from loess.
 - D 8 Nearly level loams on along Cheyenne River.
 - D 9 Undulating silty clay lo nant ice materials.
 - D10 Gently undulating silty terraces along Missour
- E1—General Crops (\$90-\$115 av per acre).
 - E1-1 Undulating clays fro shales.

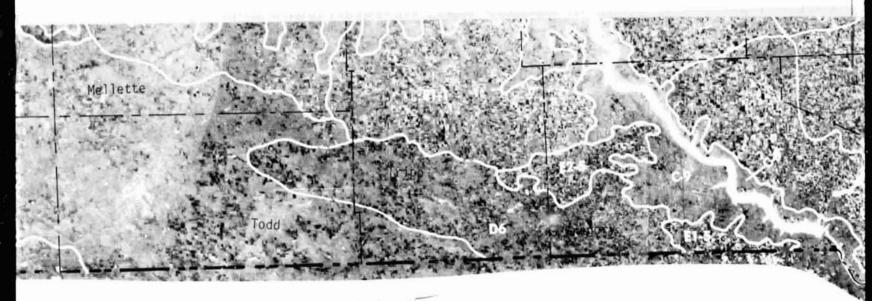

FOLDOUT FRAME

aceous shales.

al till on end ulture (\$76-\$100

ilty clay loams trials.

oams ind clay

loams from stag-

from glacial till.

ns and silt loams

loams on table-

on high terraces

.

oams from stag-

fv clay loams on ri River.

verage sale price


rom Cretaceous

- E1-2 Flat silty clay loams and some undulating sands from Lacustrine sediments and outwash and till.
- E1-3 Gently undulating silty clay loams from loess and stagnant ice deposits.
- E1-4 Sloping silty clay loams from loess moderately deep over glacial till.
- E1-5 Gently undulating loams on residual plain.
- E1-6 Nearly level clay loams from glacial till.
- E2—General Crops (\$115-8150 average sale price per acre).
 - E2-1 Undulating silty elay loams from stagnant ice deposits.
 - E2-2 Nearly level loams from glacial till.
 - E2-3 Undulating silty clay loams from stagnant ice deposits.
 - E2-4 Nearly level silt loams from Lacastrine sediments.
 - E2-5 Undulating silty clay loams from loess.
 - E2-6 Sloping silty clay loams from loess.
- F1—General crop, corn important (\$140-\$165 average sale price per acre).
 - F1-1 Nearly level loams from glacial till.
 - F1-2 Undulating silty clay loams from stagnant ice deposits.

- F1-3 Nearly level silty clay loams from lacustrine deposits.
- F2—Corn, soybeans and general crops (\$160-\$185 average sale price per acre).
 - F2-1 Sloping silty clay loams from loess.
 - F2-2 Strongly undulating silty clay loams from stagnant ice deposits.
 - F2-3 Gently undulating loams from glacial till.
 - F2-4 Strongly sloping silty clay loams from stagnant ice deposits.
- G—Corn-Soybeans (\$200-\$275 average sale price per acre).
 - G1 Sloping clay loams from locss.
 - G2 Nearly level silty clay loans from loess moderately deep over glacial (ii).
 - G3 Strongly sloping silty clay brams from loess.
- H—Corn, Soybeans and Alfalfa (8200-8425 average sale price per acre).
 - H1 Flat clays, silty clay loams, and sands from Alluvium

Imagery from Spring 1973 Negative Prints, Band 7 (IR). Plant Science Department and Remote Sensing Institute, South Dakota State University, Brookings; South Dakota Department of Revenue; and Soil Conservation Service, USDA. (Additio

Publication ber 1973, Remote Sens South Dakon Compiled by Plant Scienassembled in cialist, Re

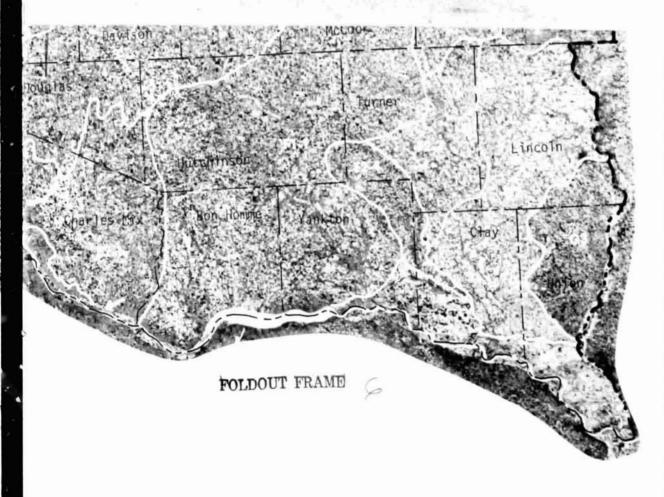

ERTS Imagery Case Map. Scale about 1:1,000,000 (1" = about 16 miles)

ditional Information on Back of Map)

cation No. AES Info Series No. 5, Novem-273, Agricultural Experiment Station and Sensing Institute No. SDSU-RSI 73-17, Dakota State University, Brookings, SD. led by Frederick C. Westin, professor, Science Department, SDSU. ERTS mosaic led by Jack Smith, photographic spet, Remote Sensing Institute. 3M--11-73--1541 About this map: Three groups cooperated to prepare this map: (1) soil survey researchers from the South Dakota State University Agricultural Experiment Station and the USDA Soil Conservation Service who prepared the Soil Association separations; (2) the Directors of Assessment and the South Dakota Department of Revenue officers who compiled the land sales of unimproved agricultural land by Soil Associations; and (3) the South Dakota State University Remote Sensing Institute, and the National Aeronautic and Space Administration contract No. NASA-ERTS NASS-21774, who furnished and prepared the ERTS Base Map from satellite imagery upon which Soil Association Value Areas are drafted.

REPRODUCT: TO THE ORIGINAL PAGE IS POGR

FOLDOUT FRAME

of an ERTS image using band 7. Scale print is in Lyman County, S. D. ERTS stands for Earth Reshows an enlargement is 1:250,000. Most of the area showing sources Technology Satellite. of the enlargement The front cover of on this negative this publication



Remote Sensing Insti.ute: SDSU RSI 73-17 South Dakota State University, Brookings

Value of Map Areas Based on Sales 1967-1972 (4, 653 sales for state)

	Value in			Value in	
Map	Dollars	No. of	Мар	Dollars	No. of
Arca	/Acre	Sales	Area	/Acre	Sales
A1	15.24	24	D8	78.00	2
A2	17.13	7	D9	89.20	85
B1-1	23.90	134	E1-1	97.92	93
B2-1	37.77	158	E1-2	115.88	170
B2-2	45.77	101	E1-3	105.74	107
B2-3	25.84	238	E1-4	90.49	117
B2-5	42.06	27	E1-6	125.36	22
B2-6	43.45	11	E2-1	117.59	193
Cl	45.41	19	E2-2	121.81	193
C2	53.65	70	E2-3	119.98	108
C4	58.72	91	E2-4	149.24	8
C5	64.05	36	E2-5	130.66	3
C6	55.19	20	E2-6	127.58	64
C7	68.99	568	F1-1	164.59	390
C9	66.50	38	F1-2	142.59	74
C10	64.18	42	F1-3	140.47	29
C11	76.47	146	F2-1	164.07	14
Dl	86.66	51	F2-2	180.03	55
D2	96.42	573	F2-3	171.54	25
D3	91.00	71	F2-4	183.50	32
D4	93.05	57	G1	253.09	81
D5	82.05	38	G2	238.20	133
D6	93.15	32	G3	226.82	29
D7	88.46	24	Hl	281.33	50
				TOTAL	4,653

Since land sale prices fluctuate, sometimes widely over short periods of time, the figures in this publication are valuable mainly in their relationship to each other. In other words, the relative values are more significant than the absolute values. In regard to absolute value data for a period 1967-1969 compared ... 1970-1972 showed that for the state as a whole, values increased 13% over this period. But this varied among counties for a net loss of 7% for one county and a net gain of 71%for another county. Over 4,600 bona fige transactions of unimproved land were used in this compilation. Land sale prices have also increased since January 1973. Estimates of this average increase range from a few percentage points up to 20% or more.

FOLDOUT_FRAME

FOLDOUT FRAME

3

Note about ERTS Imagery

The ERTS mosaic used for this base map was compiled from 20 ERTS scenes taken in May and June 1973. The imagery consists of negative prints from Eand 7 of the Multispectral Scanner of the ERTS satellite orbiting the earth at a distance of about 550 miles. The MSS records energy reflected by the features of the earth in 4 bands, each in a different part of the spectrum. Band 4 is in the green, Band 5 in the visible red and Bands o and 7 in the near infrared.

On the negative prints of Band 7 used for this base map, water reflects white, fallow or bare soil very light gray, most grass medium to light gray, and vigorously growing vegetation dark gray. Thus, much can be deduced about soil use from the reflectances of just one of the ERTS bands. By comparing reflectances of all 4 ERTS MSS Bands "signatures" can be determined identifying virtually all uses of soils. ERTS mosaics as the one shown, provide a near orthographic view (very little distortion). The mosaic shown is at a scale of about 1:1,000,000 but the imagery can be enlarged to very useable maps at scales as large as 1:100,000. Also, false color composites of 2, 3, or 4 bands at different scales can be prepared to aid in identifying soil uses, and for hydrologic, geologic, geographic and other studies. To prepare a base map of South Dakota using conventional aerial photographs, it is estimated that 30,000 separate photographs would be necessary costing about \$250,000. The ERTS base map used was compiled using 20 ERTS scenes. ERTS prints can be obtained at nominal cost from the EROS Data Center, Sioux Falls, S. D. The ERTS satellite provides complete coverage of the state every 18 days.